

NEW DUCATO

GOODS TRANSPORT



TECHNICAL SPECIFICATIONS AND MAIN EQUIPMENT




TECHNICAL SPECIFICATIONS

NEW DUCATO VANS - GLAZED AND SEMIGLAZED VANS - DROPSIDE TRUCKS

Engine	110 MultiJet II	130 MultiJet II	150 MultiJet II	180 MultiJet Power
No. of cylinders, layout	4, in line	4, in line	4, in line	4, in line
Displacement (cm3)	2287	2287	2287	2999
Compression ratio	16.2:1	16.2:1	16.2:1	17.5:1
EC max. power: kW (HP) rpm	82 (110) 3600	96 (130) 3600	109 (148) 3600	130 (177) 3500
EC max. torque: Nm (kgm) rpm	300 (30.6) 1800	320 (32.6) 1800	350 (35.7) 1500	400 (40.8) 1400
Emissions level	Euro 5+	Euro 5+	Euro 5+	Euro 5+
Timing system (control)	DOHC (toothed belt)	DOHC (toothed belt)	DOHC (toothed belt)	DOHC (chain)
Supply	electronically controlled Common Rail MultiJet II direct injection with turbocharger and intercooler	electronically controlled Common Rail MultiJet II direct injection with turbocharger and intercooler	electronically controlled Common Rail MultiJet II direct injection with variable geometry turbocharger and intercooler	electronically controlled Common Rail MultiJet direct injection with variable geometry turbocharger and intercooler
Ignition	by compression	by compression	by compression	by compression
Transmission				
Drive	front	front	front	front
Clutch	dry, single plate with hydraulic release device	dry, single plate with hydraulic release device dry, single plate with electro-hydraulic activation (Comfort-Matic)	dry, single plate with hydraulic release device dry, single plate with electro-hydraulic activation (Comfort-Matic)	dry, single plate with hydraulic release device dry, single plate with electro-hydraulic activation (Comfort-Matic)
Gearbox: no. of gears	manual 6+R	manual 6+R Comfort-Matic 6+R with electronically-controlled electro-hydraulic control system	manual 6+R Comfort-Matic 6+R with electronically-controlled electro-hydraulic control system	manual 6+R Comfort-Matic 6+R with electronically-controlled electro-hydraulic control system
Gearbox ratios	Manual	Manual Comfort-Matic Comfort-Matic MAXI	Manual Comfort-Matic Comfort-Matic MAXI	Manual / Comfort-Matic Manual / Comfort-Matic MAXI
Reduction ratios 1 st	3.727: 1	3.727: 1 4.167: 1	3.727: 1 4.167: 1	4.167: 1 4.167: 1
2 nd	1.952: 1	1.952: 1 2.350: 1	1.952: 1 2.350: 1	2.350: 1 2.350: 1
3 rd	1.290: 1	1.290: 1 1.462: 1	1.290: 1 1.462: 1	1.462: 1 1.462: 1
4 th	0.875: 1	0.875: 1 0.955: 1	0.875: 1 0.955: 1	0.955: 1 1.047: 1
5 th	0.673: 1	0.673: 1 0.695: 1	0.673: 1 0.695: 1	0.695: 1 0.786: 1
6 th	0.585: 1	0.585: 1 0.552: 1	0.585: 1 0.625: 1	0.552: 1 0.625: 1
R	3.154: 1	3.154: 1 4.083: 1	3.154: 1 4.083: 1	4.083: 1 4.083: 1
Final drive ratio	4.933: 1 (74/15)	4.933: 1 (74/15) 5.231: 1 (68/13) Maxi	4.563: 1 (73/16) 5.231: 1 (68/13) Maxi	4.222: 1 (76/18) 4.867: 1 (73/16)
Steering				
Type	rack and pinion, variable power-assisted (Servotronic)	rack and pinion, variable power-assisted (Servotronic)	rack and pinion, variable power-assisted (Servotronic)	rack and pinion, variable power-assisted (Servotronic)
Turning circle (kerb-to-kerb)	Short wheelbase 11.4 m – Medium wheelbase		12.8 m – Medium-long wheelbase 13.9 m – Long wheelbase 14.4 m	
Braking system - D (disc)				
Type		dual H-I circuit; front and rear disc brakes. ABS and	Electronic Brake force Distribution (EBD)	
Front: Ø mm	D 280 self-ventilating	D 280 self-ventilating / D 300 self-ventilating Maxi	D 280 self-ventilating / D 300 self-ventilating Maxi	
Rear: Ø mm	D 280	D 280 / D300 self-ventilating Maxi 4000 kg	D 280 / D300 self-ventilating Maxi 4000 kg	
Brake servo: Ø	11"	11" / 10" + 10" on 4000 kg	11" / 10" + 10" on 4000 kg	
Suspension				
Front	independent, MacPherson type with wishbones, coil springs,		telescopic shock absorbers and anti-roll bar	
Rear	rigid tubular axle type with parabolic longitudinal leaf springs,		telescopic shock absorbers and flexible side buffers	
Maximum permitted load on the front axle (kg)	3000 kg: 1630 kg – 3300 kg: 1750 kg 3500 kg: 1850 kg 3500 kg	3000 kg: 1630 kg – 3300 kg: 1750 kg – 3500 kg: 1850 kg 3500 kg MAXI and 4000 kg	MAXI: 2100 kg	3000 kg: 1630 kg – 3300 kg: 1750 kg – 3500 kg: 1850 kg 3500 kg MAXI and 4000 kg MAXI: 2100 kg
Maximum permitted load on the rear axle (kg)	3000 kg: 1650 kg – 3300 kg: 1900 kg – 3500 kg: 2000 kg 3500 kg	3000 kg: 1650 kg – 3300 kg: 1900 kg – 3500 kg: 2000 kg 3500 kg MAXI and 4000 kg	MAXI: 2400 kg-2500 kg***	3000 kg: 1650 kg – 3300 kg: 1900 kg – 3500 wkg: 2000 kg 3500 kg MAXI and 4000 kg MAXI: 2400 kg-2500 kg***
Wheels				
Tyres	215/70 R 15 C (225/70 R 15 C, 215/75 R 16 C, 225/75 R 16 C optional).		Maxi: 215/75 R 16 C on 3500 kg - 225/75 R 16 C on 4000 kg (opt. on 3500 kg Maxi)	
Electrical system (12 V)				
Battery capacity (Ah)	95 Ah, 110 Ah with opt. boosted battery	95 Ah, 110 Ah with opt. boosted battery	95 Ah, 110 Ah with opt. boosted battery	110 Ah
Alternator (A)	110 A, 140 A with climate control, 180 A with opt. more powerful alternator	110 A, 140 A with climate control, 180 A with opt. more powerful alternator	110 A, 140 A with climate control, 180 A with opt. more powerful alternator	110 A, 140 A with climate control, 180 A with opt. more powerful alternator
Weights and capacities				
Max. towable weight (braked) (kg)	2500	2500 - 3000*	2500 - 3000*	2000** - 2500 - 3000*
Fuel tank capacity (litres)	90 (opt. 60-120)	90 (opt. 60-120)	90 (opt. 60-120)	90 (opt. 60-120)
Performance				
Top speed* (MPH)	96	96	100	106
NEDC consumption (l/100 km)	6.4	6.4 - 6.2*	6.4 - 6.2▼	7.7
NEDC CO ₂ emissions (mpg)	44,1	44.1 - 45.6	44.1 - 45.6	36,7
NEDC CO ₂ emissions (g/km)	170	170 - 186	183 -186	209 - 236

*MAXI 3500 kg **MAXI 4250 kg ***with opt. 057 ▲ Min. and max. values depending on model and version ▼ With opt. Start&Stop

VANS WHEELBASE 3000 MM

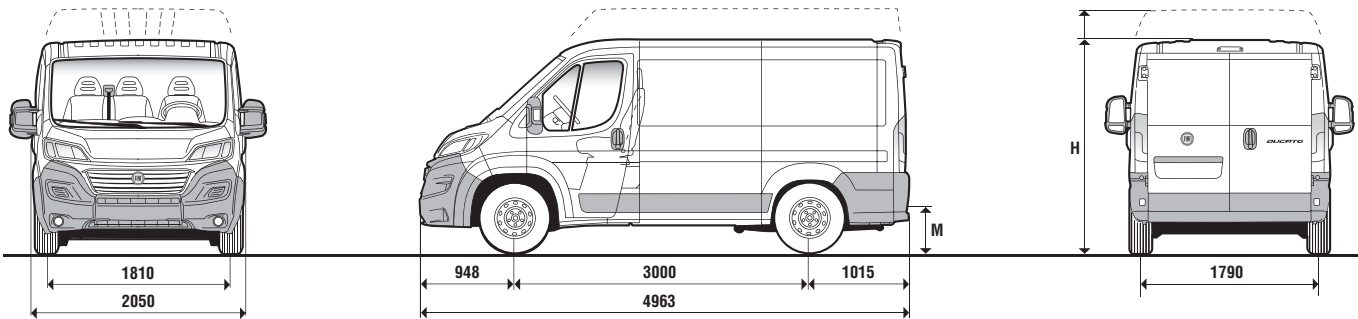

Dimensions mm	Van 3000 kg		Van 3300 kg		Van 3500 kg	
	Standard	High	Standard	High	Standard	High
Wheelbase	3000	3000	3000	3000	3000	3000
Maximum length	4963	4963	4963	4963	4963	4963
Maximum width	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
H Maximum height (unladen)	2254	2522	2254	2522	2254	2522
Front overhang	948	948	948	948	948	948
Rear overhang	1015	1015	1015	1015	1015	1015
Rear door						
Width	1562	1562	1562	1562	1562	1562
Height	1520	1790	1520	1790	1520	1790
Side door						
Width	1075	1075	1075	1075	1075	1075
Height	1485	1485	1485	1485	1485	1485
Load compartment						
Maximum length	2670	2670	2670	2670	2670	2670
Maximum width	1870	1870	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422	1422	1422
Maximum height	1662	1932	1662	1932	1662	1932
M Height of load threshold (unladen)	535	535	535	535	535	535


Volume 8 m³	Van 3000 kg				Van 3300 kg				Van 3500 kg			
	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions												
Vehicle weight▲ (tare) (kg)	1860	1860	1860	1940	1860	1860	1860	1940	1860	1860	1860	1940
Payload ▼ (kg)	1140	1140	1140	1060	1440	1440	1440	1360	1640	1640	1640	1560
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	96	96	100	106	96	96	100	106	96	96	100	106
NEDC consumption (l/100 km)	6,4	6.2*/6.4	6.2*/6.4	7,7	6,4	6.2*/6.4	6.2*/6.4	7,7	6,4	6.2*/6.4	6.2*/6.4	7,7
NEDC consumption (mpg)	44,1	45.6*/44.1	45.6*/44.1	36,7	44,1	45.6*/44.1	45.6*/44.1	36,7	44,1	45.6*/44.1	45.6*/44.1	36,7
NEDC CO ₂ emissions (g/km)	170	164*/170	164*/170	203	170	164*/170	164*/170	203	170	164*/170	164*/170	203

Volume 9.5 m³	Van 3000 kg High				Van 3300 kg High				Van 3500 kg High			
	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions												
Vehicle weight▲ (tare) (kg)	1890	1890	1890	1970	1890	1890	1890	1970	1890	1890	1890	1970
Payload ▼ (kg)	1110	1110	1110	1030	1410	1410	1410	1330	1610	1610	1610	1530
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	93	93	97	103	93	93	97	103	93	93	97	103
NEDC consumption (l/100 km)	7,0	6.8*/7.0	6.8*/7.0	7,7	7,0	6.8*/7.0	6.8*/7.0	7,7	7,0	6.8*/7.0	6.8*/7.0	7,7
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	36,7	40,4	41.5*/40.4	41.5*/40.4	36,7	40,4	41.5*/40.4	41.5*/40.4	36,7
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	203	183	177*/183	177*/183	203	183	177*/183	177*/183	203

Volume 8 m³	Van 3500 kg Maxi			Van 4000 kg Maxi		
	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions						
Vehicle weight▲ (tare) (kg)	1900	1900	1980	1945	1945	2025
Payload ▼ (kg)	1600	1600	1520	2060	2060	1980
GVW (kg)	3500	3500	3500	4005	4005	4005
Top speed (MPH)	96	100	100	96	100	100
NEDC consumption (l/100 km)	6.8*/7.0	6.8*/7.1	6,3	6.8*/7.0	6.8*/7.0	8,6
NEDC consumption (mpg)	41.5*/40.4	41.5*/40.4	34	41.5*/40.4	41.5*/40.4	32,8
NEDC CO ₂ emissions (g/km)	177*/183	177*/183	219	177*/183	177*/183	226

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop
*2600 kg ECO version available soon. Without sliding side door, includes speed limiter at 90 km/h and 2 front single seats

GLAZED/SEMIGLAZED VANS WHEELBASE 3000 MM

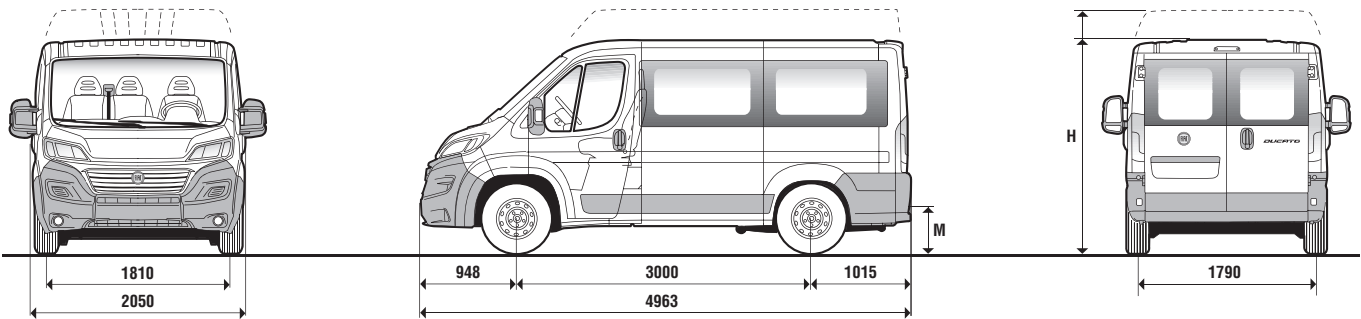


Dimensions mm	Van 3000 kg		Van 3300 kg		Van 3500 kg	
	Standard	High	Standard	High	Standard	High
Wheelbase	3000	3000	3000	3000	3000	3000
Maximum length	4963	4963	4963	4963	4963	4963
Maximum width	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
H Maximum height (unladen)	2254	2524	2254	2524	2254	2524
Front overhang	948	948	948	948	948	948
Rear overhang	1015	1015	1015	1015	1015	1015
Rear door						
Width	1562	1562	1562	1562	1562	1562
Height	1520	1790	1520	1790	1520	1790
Side door						
Width	1075	1075	1075	1075	1075	1075
Height	1485	1485	1485	1485	1485	1485
Load compartment						
Maximum length	2670	2670	2670	2670	2670	2670
Maximum width	1870	1870	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422	1422	1422
Maximum height	1662	1932	1662	1932	1662	1932
M Height of load threshold (unladen)	535	535	535	535	535	535

Volume 8 m³	Van 3000 kg**				Van 3300 kg**				Van 3500 kg**			
	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions												
Vehicle weight▲ (tare) (kg)	1860	1860	1860	1940	1860	1860	1860	1940	1860	1860	1860	1940
Payload ▼ (kg)	1140	1140	1140	1060	1440	1440	1440	1360	1640	1640	1640	1560
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	96	96	100	106	96	96	100	106	96	96	100	106
NEDC consumption (l/100 km)	6,4	6.2*/6.4	6.2*/6.4	7,7	6,4	6.2*/6.4	6.2*/6.4	7,7	6,4	6.2*/6.4	6.2*/6.4	7,7
NEDC consumption (mpg)	44,1	45.6*/44.1	45.6*/44.1	36,7	44,1	45.6*/44.1	45.6*/44.1	36,7	44,1	45.6*/44.1	45.6*/44.1	36,7
NEDC CO ₂ emissions (g/km)	170	164*/170	164*/170	203	170	164*/170	164*/170	203	170	164*/170	164*/170	203

Volume 9.5 m³	Van 3000 kg High**				Van 3300 kg High**				Van 3500 kg High**			
	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions												
Vehicle weight▲ (tare) (kg)	1890	1890	1890	1970	1890	1890	1890	1970	1890	1890	1890	1970
Payload ▼ (kg)	1110	1110	1110	1030	1410	1410	1410	1330	1610	1610	1610	1530
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	93	93	97	103	93	93	97	103	93	93	97	103
NEDC consumption (l/100 km)	7	6.8*/7.0	6.8*/7.0	7,7	7	6.8*/7.0	6.8*/7.0	7,7	7	6.8*/7.0	6.8*/7.0	7,7
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	36,7	40,4	41.5*/40.4	41.5*/40.4	36,7	40,4	41.5*/40.4	41.5*/40.4	36,7
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	203	183	177*/183	177*/183	203	183	177*/183	177*/183	203

** Semiglazed version available
▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

VANS WHEELBASE 3450 MM

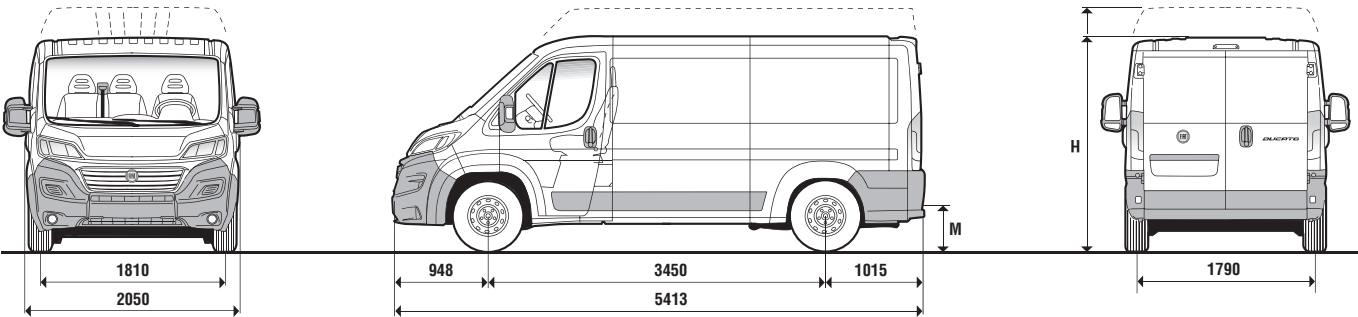


Dimensions mm	Van 3000 kg		Van 3300 kg		Van 3500 kg	
	Standard	High	Standard	High	Standard	High
Wheelbase	3450	3450	3450	3450	3450	3450
Maximum length	5413	5413	5413	5413	5413	5413
Maximum width	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
H Maximum height (unladen)	2254	2524	2254	2524	2254	2524
Front overhang	948	948	948	948	948	948
Rear overhang	1015	1015	1015	1015	1015	1015
Rear door						
Width	1562	1562	1562	1562	1562	1562
Height	1520	1790	1520	1790	1520	1790
Side door						
Width	1250	1250	1250	1250	1250	1250
Height	1485	1755	1485	1755	1485	1755
Load compartment						
Maximum length	3120	3120	3120	3120	3120	3120
Maximum width	1870	1870	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422	1422	1422
Maximum height	1662	1932	1662	1932	1662	1932
M Height of load threshold (unladen)	535	535	535	535	535	535

Volume 10 m ³	Van 3000 kg				Van 3300 kg				Van 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1,411	1900	1900	1980	1900	1900	1900	1980	1900	1900	1900	1980
Payload▼ (kg)	1100	1100	1100	1020	1400	1400	1400	1320	1600	1600	1600	1520
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	96	96	100	106	96	96	100	106	96	96	100	106
NEDC consumption (l/100 km)	7,0	6.8*/7.0	6.8*/7.0	7,7	7,0	6.8*/7.0	6.8*/7.0	7,7	7,0	6.8*/7.0	6.8*/7.0	7,7
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	36,7	40,4	41.5*/40.4	41.5*/40.4	36,7	40,4	41.5*/40.4	41.5*/40.4	36,7
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	203	183	177*/183	177*/183	203	183	177*/183	177*/183	203

Volume 11.5 m ³	Van 3000 kg High				Van 3300 kg High				Van 3500 kg High			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1925	1925	1925	2005	1925	1925	1925	2005	1925	1925	1925	2005
Payload▼ (kg)	1075	1075	1075	995	1375	1375	1375	1295	1575	1575	1575	1495
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	93	93	97	103	93	93	97	103	93	93	97	103
NEDC consumption (l/100 km)	7	6.8*/7.0	6.8*/7.0	8	7	6.8*/7.0	6.8*/7.0	8	7	6.8*/7.0	6.8*/7.0	8
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	35,3	40,4	41.5*/40.4	41.5*/40.4	35,3	40,4	41.5*/40.4	41.5*/40.4	35,3
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	209	183	177*/183	177*/183	209	183	177*/183	177*/183	209

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

GLAZED/SEMIGLAZED VANS WHEELBASE 3450 MM

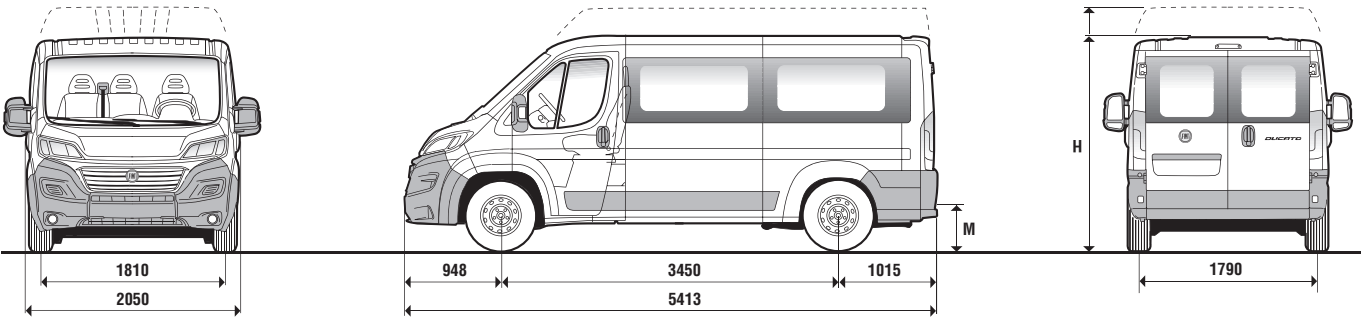

Dimensions mm	Van 3000 kg Standard	Van 3300 kg		Van 3500 kg	
	Standard	Standard	High	Standard	High
Wheelbase	3450	3450	3450	3450	3450
Maximum length	5413	5413	5413	5413	5413
Maximum width	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790
H Maximum height (unladen)	2254	2254	2524	2254	2524
Front overhang	948	948	948	948	948
Rear overhang	1015	1015	1015	1015	1015
Rear door					
Width	1562	1562	1562	1562	1562
Height	1520	1520	1790	1520	1790
Side door					
Width	1250	1250	1250	1250	1250
Height	1485	1485	1755	1485	1755
Load compartment					
Maximum length	3120	3120	3120	3120	3120
Maximum width	1870	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422	1422
Maximum height	1662	1662	1932	1662	1932
M Height of load threshold (unladen)	535	535	535	535	535


Volume 10 m ³	Van 3000 kg				Van 3300 kg				Van 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1900	1900	1900	1980	1900	1900	1900	1980	1900	1900	1900	1980
Payload▼ (kg)	1100	1100	1100	1020	1400	1400	1400	1320	1600	1600	1600	1520
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	96	96	100	106	96	96	100	106	96	96	100	106
NEDC consumption (l/100 km)	7,0	6.8*/7.0	6.8*/7.0	7,7	7	6.8*/7.0	6.8*/7.0	7,7	7	6.8*/7.0	6.8*/7.0	7,7
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	36,7	40,4	41.5*/40.4	41.5*/40.4	36,7	40,4	41.5*/40.4	41.5*/40.4	36,7
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	203	183	177*/183	177*/183	203	183	177*/183	177*/183	203

Volume 11.5 m ³	Van 3300 kg High**				Van 3500 kg High**			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1925	1925	1925	2005	1925	1925	1925	2005
Payload▼ (kg)	1375	1375	1375	1295	1575	1575	1575	1495
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	93	93	97	103	93	93	97	103
NEDC consumption (l/100 km)	7	6.8*/7.0	6.8*/7.0	8	7	6.8*/7.0	6.8*/7.0	8
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	35,3	40,4	41.5*/40.4	41.5*/40.4	35,3
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	209	183	177*/183	177*/183	209

** Semiglazed version available

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

VANS MAXI WHEELBASE 3450 MM

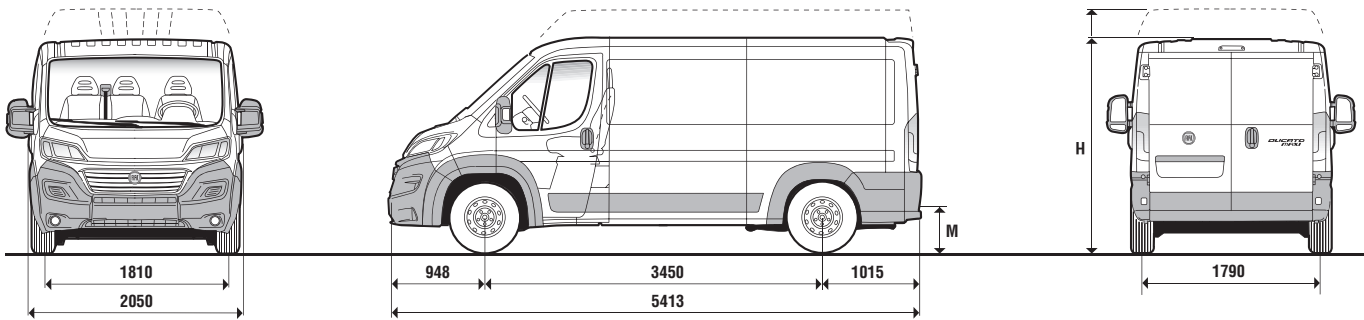


Dimensions mm	Van Maxi 3500 kg		Van Maxi 4000 kg High
	Standard	High	
Wheelbase	3450	3450	3450
Maximum length	5413	5413	5413
Maximum width	2050	2050	2050
Front track	1810	1810	1810
Rear track	1790	1790	1790
H Maximum height (unladen)	2269	2539	2539
Front overhang	948	948	948
Rear overhang	1015	1015	1015
Rear door			
Width	1562	1562	1562
Height	1520	1790	1790
Side door			
Width	1250	1250	1250
Height	1485	1755	1755
Load compartment			
Maximum length	3120	3120	3120
Maximum width	1870	1870	1870
Width between wheel arches	1422	1422	1422
Maximum height	1662	1932	1932
M Height of load threshold (unladen)	550	550	550

Volume 10 m³	Van Maxi 3500 kg		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	1940	1940	2020
Payload [▼] (kg)	1560	1560	1480
GVW (kg)	3500	3500	3500
Top speed (MPH)	96	100	100
NEDC consumption (l/100 km)	6.8*/7.0	6.8*/7.0	8,6
NEDC consumption (mpg)	41.5*/40.4	41.5*/40.4	32,8
NEDC CO ₂ emissions (g/km)	177*/183	177*/183	226

Volume 11.5 m³	Van Maxi 3500 kg High			Van Maxi 4000 kg High		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	1965	1965	2045	2010	2010	2090
Payload [▼] (kg)	1535	1535	1455	1995	1995	1915
GVW (kg)	3500	3500	3500	4005	4005	4005
Top speed (MPH)	93	97	100	93	97	99
NEDC consumption (l/100 km)	6.8*/7.0	6.8*/7.0	8,6	6.9*/7.1	6.9*/7.1	8,6
NEDC consumption (mpg)	41.5*/40.4	41.5*/40.4	32,8	40.9*/39.8	40.9*/39.8	32,8
NEDC CO ₂ emissions (g/km)	177*/183	177*/183	226	180*/186	180*/186	226

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

GLAZED/SEMIGLAZED MAXI VANS WHEELBASE 3450 MM

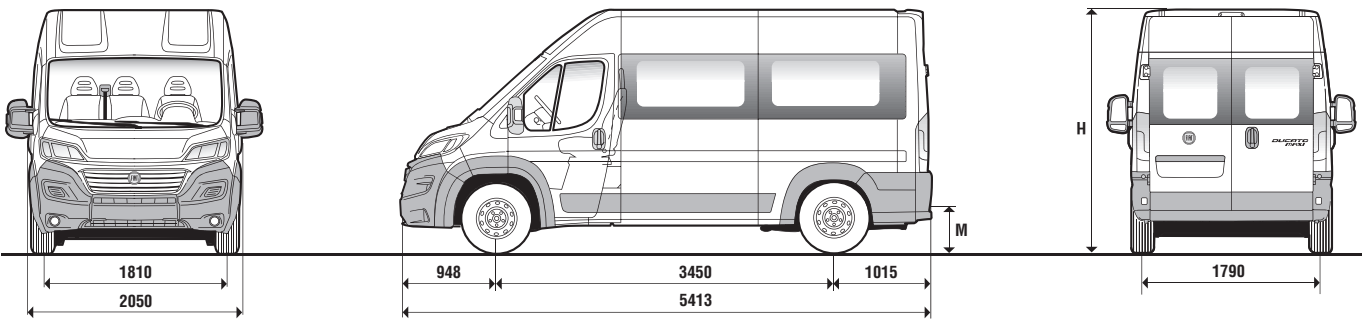


Dimensions mm	Van Maxi 3500 kg High		Van Maxi 4000 kg High
Wheelbase	3450		3450
Maximum length	5413		5413
Maximum width	2050		2050
Front track	1810		1810
Rear track	1790		1790
H Maximum height (unladen)	2539		2539
Front overhang	948		948
Rear overhang	1015		1015
Rear door			
Width	1562		1562
Height	1790		1790
Side door			
Width	1250		1250
Height	1755		1755
Load compartment			
Maximum length	3120		3120
Maximum width	1870		1870
Width between wheel arches	1422		1422
Maximum height	1932		1932
M Height of load threshold (unladen)	550		550

Volume 11.5 m³	Van Maxi 3500 kg High**			Van Maxi 4000 kg High**		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	1965	1965	2045	2010	2010	2090
Payload [▼] (kg)	1535	1535	145 5	1995	1995	1915
GVW (kg)	3500	3500	3500	4005	4005	4005
Top speed (MPH)	93	97	99	93	97	99
NEDC consumption (l/100 km)	6.8*/7.0	6.8*/7.0	8,6	6.9*/7.1	6.9*/7.1	8,6
NEDC consumption (mpg)	41.5*/40.4	41.5*/40.4	32,8	40.9*/39.8	40.9*/39.8	32,8
NEDC CO ₂ emissions (g/km)	177*/183	177*/183	226	180*/186	180*/186	226

** Semiglazed version available

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

VANS WHEELBASE 4035 MM

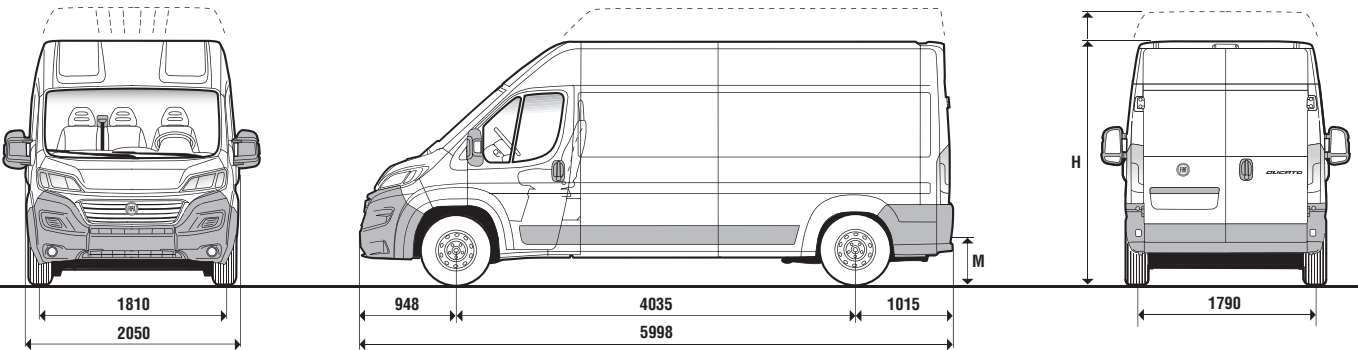


Dimensions mm	Van 3300 kg		Van 3500 kg	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	5998	5998	5998	5998
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2524	2764	2524	2764
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	3705	3705	3705	3705
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Height of load threshold (unladen)	535	535	535	535

Volume 13 m ³	Van 3300 kg High				Van 3500 kg High			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	1975	1975	1975	2055	1975	1975	1975	2055
Payload [▼] (kg)	1325	1325	1325	1245	1525	1525	1525	1445
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	93	93	97	103	93	93	97	103
NEDC consumption (l/100 km)	7,0	6.8*/7.0	6.8*/7.0	8	7	6.8*/7.0	6.8*/7.0	8
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	35,3	40,4	41.5*/40.4	41.5*/40.4	35,3
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	209	183	177*/183	177*/183	209

Volume 15 m ³	Van 3300 kg Super High				Van 3500 kg Super High			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2000	2000	2000	2080	2000	2000	2000	2080
Payload [▼] (kg)	1300	1300	1300	1220	1500	1500	1500	1420
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	90	90	94	100	90	90	94	100
NEDC consumption (l/100 km)	7	6.8*/7.0	6.8*/7.0	8	7	6.8*/7.0	6.8*/7.0	8
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	35,3	40,4	41.5*/40.4	41.5*/40.4	35,3
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	209	183	177*/183	177*/183	209

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

GLAZED/SEMIGLAZED VANS WHEELBASE 4035 MM

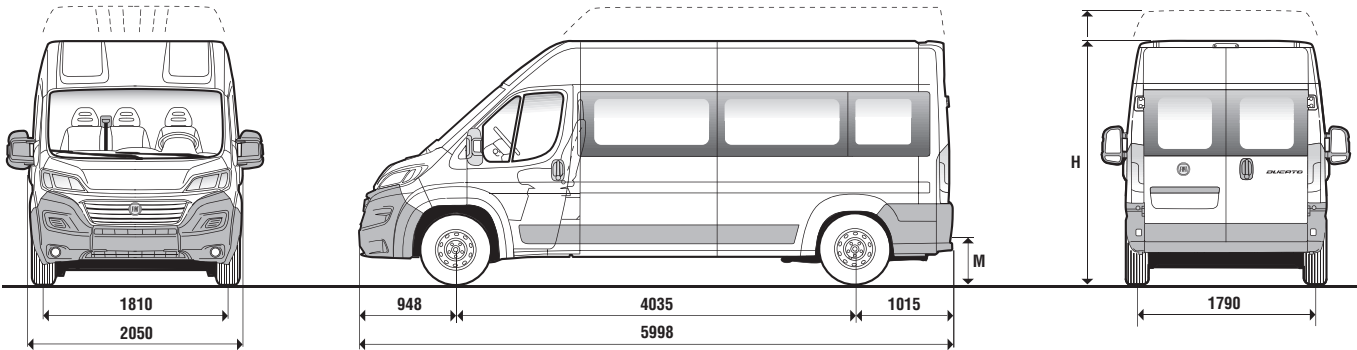

Dimensions mm	Van 3300 kg		Van 3500 kg	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	5998	5998	5998	5998
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2524	2764	2524	2764
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	3705	3705	3705	3705
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Height of load threshold (unladen)	535	535	535	535


Volume 13 m ³	Van 3300 kg High**				Van 3500 kg High**			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	1975	1975	1975	2055	1975	1975	1975	2055
Payload [▼] (kg)	1325	1325	1325	1245	1525	1525	1525	1445
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	93	93	97	103	93	93	97	103
NEDC consumption (l/100 km)	7,0	6.8*/7.0	6.8*/7.0	8	7,0	6.8*/7.0	6.8*/7.0	8
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	35,3	40,4	41.5*/40.4	41.5*/40.4	35,3
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	209	183	177*/183	177*/183	209

Volume 15 m ³	Van 3300 kg Super High				Van 3500 kg Super High			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2000	2000	2000	2080	2000	2000	2000	2080
Payload [▼] (kg)	1300	1300	1300	1220	1500	1500	1500	1420
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	90	90	94	100	90	90	93	100
NEDC consumption (l/100 km)	7,0	6.8*/7.0	6.8*/7.0	8	7,0	6.8*/7.0	6.8*/7.0	8
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	35,3	40,4	41.5*/40.4	41.5*/40.4	35,3
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	209	183	177*/183	177*/183	209

** Semiglazed version available

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

VANS MAXI WHEELBASE 4035 MM

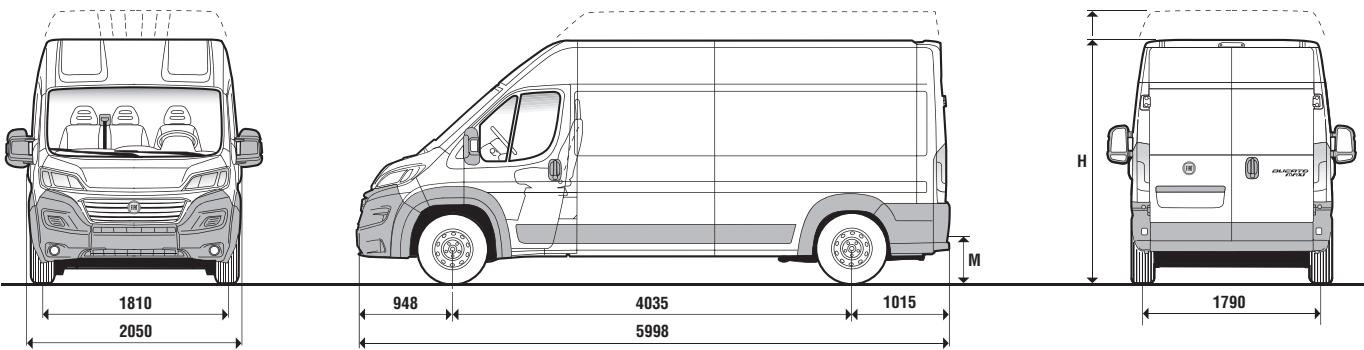


Dimensions mm	Van Maxi 3500 kg		Van Maxi 4000 kg	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	5998	5998	5998	5998
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2534	2774	2534	2774
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	3705	3705	3705	3705
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Height of load threshold (unladen)	550	550	550	550

Volume 13 m ³	Van Maxi 3500 kg High			Van Maxi 4000 kg High		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2015	2015	2095	2060	2060	2140
Payload▼ (kg)	1485	1485	1405	1945	1945	2110
GVW (kg)	3500	3500	3500	4005	4005	4250
Top speed (MPH)	93	97	99	93	97	99
NEDC consumption (l/100 km)	6.9*/7.1	6.9*/7.1	8,6	6.9*/7.1	6.9*/7.1	8,9
NEDC consumption (mpg)	40.9*/39.8	40.9*/39.8	32,8	40.9*/39.8	40.9*/39.8	31,7
NEDC CO ₂ emissions (g/km)	180*/186	180*/186	226	180*/186	180*/186	236

Volume 15 m ³	Van Maxi 3500 kg Super High			Van Maxi 4000 kg Super High		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2040	2040	2120	2085	2085	2165
Payload▼ (kg)	1460	1460	1380	1920	1920	2085
GVW (kg)	3500	3500	3500	4005	4005	4250
Top speed (MPH)	90	94	96	90	94	96
NEDC consumption (l/100 km)	6.9*/7.1	6.9*/7.1	8,9	6.9*/7.1	6.9*/7.1	8,9
NEDC consumption (mpg)	40.9*/39.8	40.9*/39.8	31,7	40.9*/39.8	40.9*/39.8	31,7
NEDC CO ₂ emissions (g/km)	180*/186	180*/186	236	180*/186	180*/186	236

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

GLAZED/SEMIGLAZED MAXI VANS WHEELBASE 4035 MM

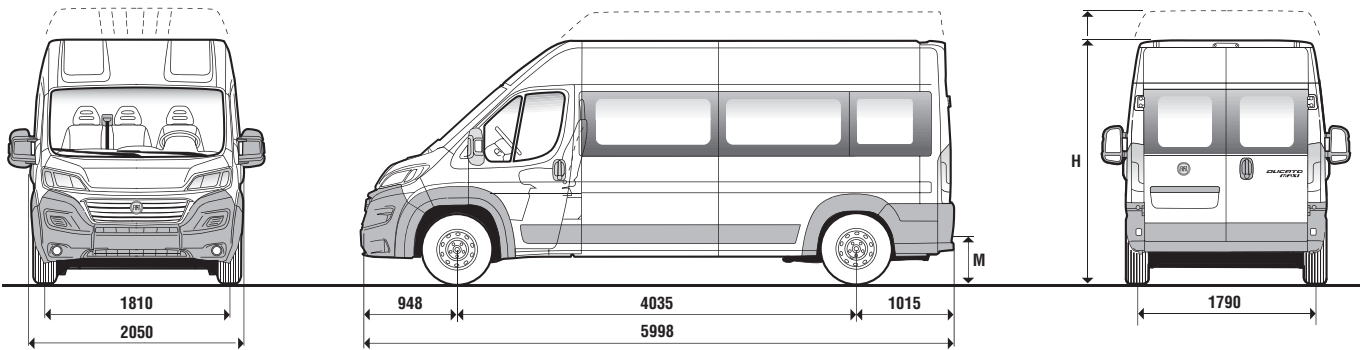

Dimensions mm	Van Maxi 3500 kg		Van Maxi 4000 kg	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	5998	5998	5998	5998
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2534	2774	2534	2774
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	3705	3705	3705	3705
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Height of load threshold (unladen)	550	550	550	550


Volume 13 m ³	Van Maxi 3500 kg High**			Van Maxi 4000 kg High**		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2015	2015	2095	2060	2060	2140
Payload▼ (kg)	1485	1485	1405	1945	1945	2110
GVW (kg)	3500	3500	3500	4005	4005	4250
Top speed (MPH)	93	97	99	93	97	99
NEDC consumption (l/100 km)	6.9*/7.1	6.9*/7.1	8,6	6.9*/7.1	6.9*/7.1	8,9
NEDC consumption (mpg)	40.9*/39.8	40.9*/39.8	32,8	40.9*/39.8	40.9*/39.8	31,7
NEDC CO ₂ emissions (g/km)	180*/186	180*/186	226	180*/186	180*/186	236

Volume 15 m ³	Van Maxi 3500 kg Super High			Van Maxi 4000 kg Super High		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2040	2040	2120	2085	2085	2165
Payload▼ (kg)	1460	1460	1380	1920	1920	2085
GVW (kg)	3500	3500	3500	4005	4005	4250
Top speed (MPH)	90	94	96	90	94	96
NEDC consumption (l/100 km)	6.9*/7.1	6.9*/7.1	8,9	6.9*/7.1	6.9*/7.1	8,9
NEDC consumption (mpg)	40.9*/39.8	40.9*/39.8	31,7	40.9*/39.8	40.9*/39.8	31,7
NEDC CO ₂ emissions (g/km)	180*/186	180*/186	236	180*/186	180*/186	236

** Semiglazed version available

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

VANS XL WHEELBASE 4035 MM

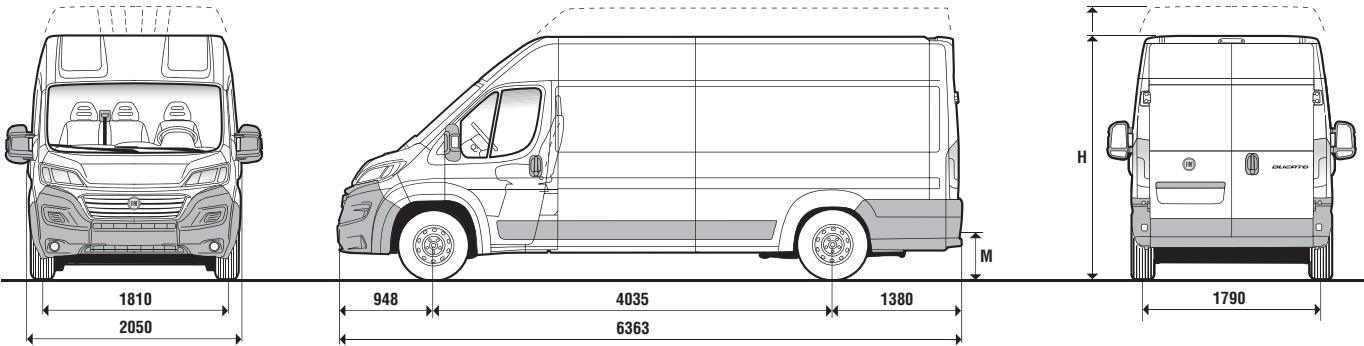


Dimensions mm	Van 3500 kg XL	
	High	Super High
Wheelbase	4035	4035
Maximum length	6363	6363
Maximum width	2050	2050
Front track	1810	1810
Rear track	1790	1790
H Maximum height (unladen)	2539	2779
Front overhang	948	948
Rear overhang	1380	1380
Rear door		
Width	1562	1562
Height	1790	2030
Side door		
Width	1250	1250
Height	1755	1755
Load compartment		
Maximum length	4070	4070
Maximum width	1870	1870
Width between wheel arches	1422	1422
Maximum height	1932	2172
M Height of load threshold (unladen)	535	535

Volume 15 m ³	Van 3500 kg XL High			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2020	2020	2020	2100
Payload [▼] (kg)	1480	1480	1480	1400
GVW (kg)	3500	3500	3500	3500
Top speed (MPH)	93	93	97	103
NEDC consumption (l/100 km)	7.1	6.9*/7.1	6.9*/7.1	8
NEDC consumption (mpg)	39.8	40.9*/39.8	40.9*/39.8	35.3
NEDC CO ₂ emissions (g/km)	186	180*/186	180*/186	209

Volume 17 m ³	Van 3500 kg XL Super High			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2050	2050	2050	2130
Payload [▼] (kg)	1450	1450	1450	1370
GVW (kg)	3500	3500	3500	3500
Top speed (MPH)	90	90	94	100
NEDC consumption (l/100 km)	7.1	6.9*/7.1	6.9*/7.1	8.5
NEDC consumption (mpg)	39.8	40.9*/39.8	40.9*/39.8	33.2
NEDC CO ₂ emissions (g/km)	186	180*/186	180*/186	224

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

VANS MAXI XL WHEELBASE 4035 MM

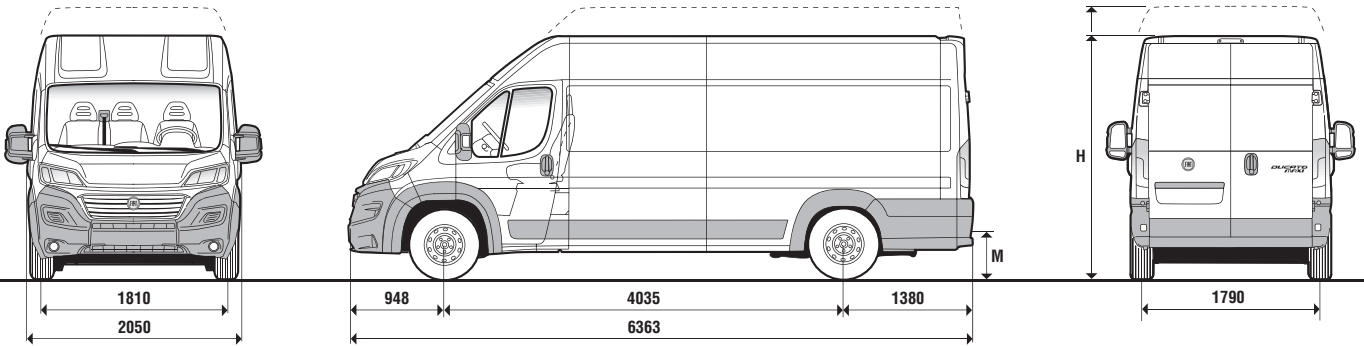


Dimensions mm	Van Maxi 3500 kg XL		Van Maxi 4000 kg XL	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	6363	6363	6363	6363
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2534	2774	2534	2779
Front overhang	948	948	948	948
Rear overhang	1380	1380	1380	1380
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	4070	4070	4070	4070
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Height of load threshold (unladen)	550	550	550	550

Volume 15 m ³	Van Maxi 3500 kg XL High			Van Maxi 4000 kg XL High		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2060	2060	2140	2105	2105	2185
Payload [▼] (kg)	1440	1440	1360	1885	1885	2065
GVW (kg)	3500	3500	3500	3990	3990	4250
Top speed (MPH)	93	97	99	93	97	99
NEDC consumption (l/100 km)	6.9*/7.1	6.9*/7.1	8.9	6.9*/7.1	6.9*/7.1	8.9
NEDC consumption (mpg)	40.9*/39.8	40.9*/39.8	31.7	40.9*/39.8	40.9*/39.8	31.7
NEDC CO ₂ emissions (g/km)	180*/186	180*/186	236	180*/186	180*/186	236

Volume 17 m ³	Van Maxi 3500 kg XL Super High			Van Maxi 4000 kg XL Super High		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2090	2090	2170	2135	2135	2215
Payload [▼] (kg)	1410	1410	1330	1870	1870	2035
GVW (kg)	3500	3500	3500	4005	4005	4250
Top speed (MPH)	90	94	96	90	94	96
NEDC consumption (l/100 km)	6.9*/7.1	6.9*/7.1	8.9	7.1*/7.3	7.1*/7.3	8.9
NEDC consumption (mpg)	40.9*/39.8	40.9*/39.8	31.7	39.8*/38.7	39.8*/38.7	31.7
NEDC CO ₂ emissions (g/km)	180*/186	180*/186	236	186*/192	186*/192	236

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

VANS GLAZED MAXI XL WHEELBASE 4035 MM

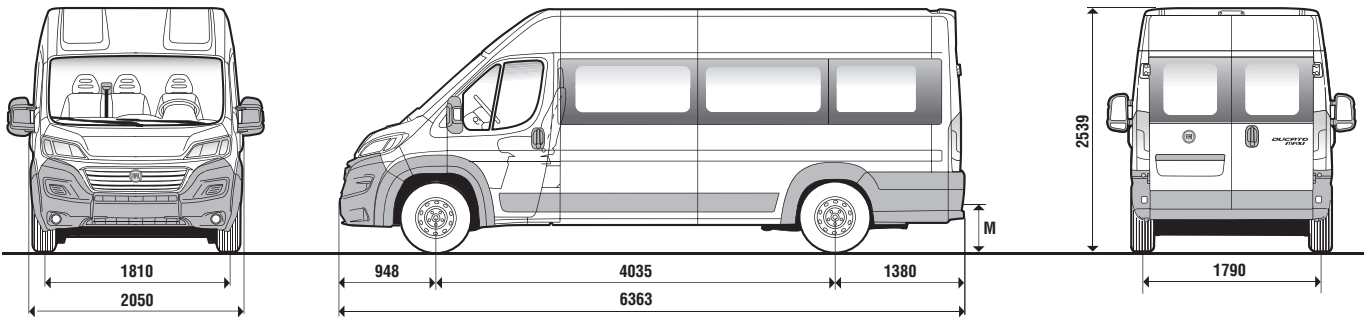


Dimensions mm	Van Maxi 3500 kg XL High	Van Maxi 4000 kg XL High
Wheelbase	4035	4035
Maximum length	6363	6363
Maximum width	2050	2050
Front track	1810	1810
Rear track	1790	1790
Maximum height (unladen)	2539	2539
Front overhang	948	948
Rear overhang	1380	1380
Rear door		
Width	1562	1562
Height	1790	1790
Side door		
Width	1250	1250
Height	1755	1755
Load compartment		
Maximum length	4070	4070
Maximum width	1870	1870
Width between wheel arches	1422	1422
Maximum height	1932	1932
M Height of load threshold (unladen)	550	550

Volume 15 m³	Van Maxi 3500 kg XL High			Van Maxi 4000 kg XL High		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2060	2060	2140	2105	2105	2185
Payload [▼] (kg)	1440	1440	1360	1900	1900	2065
GVW (kg)	3500	3500	3500	4005	4005	4250
Top speed (MPH)	93	97	99	93	97	99
NEDC consumption (l/100 km)	6.9*/7.1	6.9*/7.1	8.9	6.9*/7.1	6.9*/7.1	8.9
NEDC consumption (mpg)	40.9*/39.8	40.9*/39.8	31.7	40.9*/39.8	40.9*/39.8	31.7
NEDC CO ₂ emissions (g/km)	180*/186	180*/186	236	180*/186	180*/186	236

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

CREW VAN (OPT. 7EB)

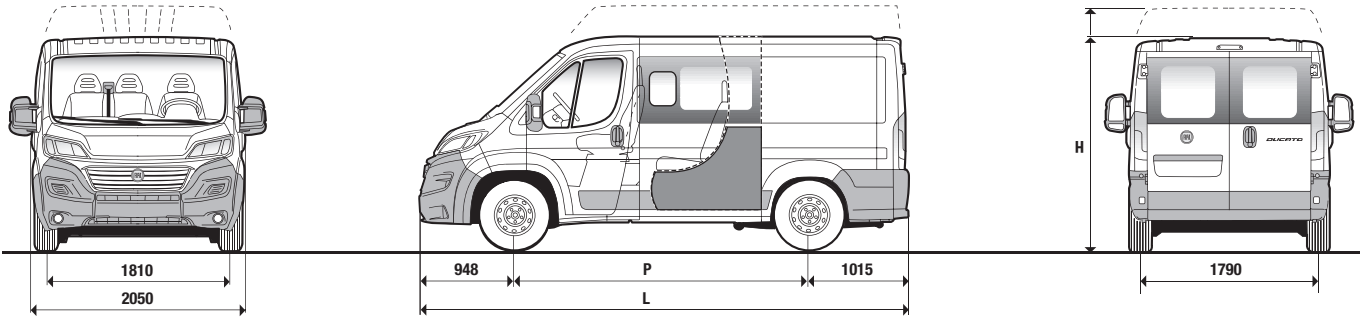


Dimensions mm	Crew Van 3300 kg			Crew Van 3500 kg			Crew Van Maxi 3500 kg			
	Standard		High	Standard		High	Standard		High	
P Wheelbase	3000	3450	3450	3000	3450	3450	3000	3450	3450	4035
L Maximum length	4963	5413	5413	4963	5413	5413	4963	5413	5413	5998
Maximum width	2050	2050	2050	2050	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790	1790	1790	1790
H Maximum height (unladen)	2254	2254	2524	2254	2254	2524	2254	2269	2539	2534
Front overhang	948	948	948	948	948	948	948	948	948	948
Rear overhang	1015	1015	1015	1015	1015	1015	1015	1015	1015	1015
Rear door										
Width	1562	1562	1562	1562	1562	1562	1562	1562	1562	1562
Height	1520	1520	1790	1520	1520	1790	1520	1520	1790	1790
Side door										
Width	1075	1250	1250	1075	1250	1250	1075	1250	1250	1250
Height	1485	1485	1755	1485	1485	1755	1485	1485	1755	1755
Load compartment										
Maximum length	1480	1930	1930	1480	1930	1930	1480	1930	1930	2515
Maximum width	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422	1422	1422	1422	1422	1422	1422
Maximum height	1662	1662	1932	1662	1662	1932	1662	1662	1932	1932
M Height of load threshold (unladen)	535	535	535	535	535	535	550	550	550	550

Volume 5.5 m³	Crew Van 3300 kg				Crew Van 3500 kg				Crew Van Maxi 3500 kg		
Short wheelbase low roof											
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2026	2026	2026	2106	2026	2026	2026	2106	2066	2066	2146
Payload [▼] (kg)	1274	1274	1274	1194	1474	1474	1474	1394	1434	1434	1354
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500	3500	3500	3500
Top speed (MPH)	96	96	100	106	96	96	100	106	96	100	100
NEDC consumption (l/100 km)	7.3	7.1*/7.3	7.1*/7.3	8.5	7.3	7.1*/7.3	7.1*/7.3	8.5	7.1*/7.3	7.1*/7.3	8.9
NEDC consumption (mpg)	38.7	39.8*/38.7	39.8*/38.7	33.2	38.7	39.8*/38.7	39.8*/38.7	33.2	39.8*/38.7	39.8*/38.7	31.7
NEDC CO ₂ emissions (g/km)	192	186*/192	186*/192	224	192	186*/192	186*/192	224	186*/192	186*/192	236

Volume 7 m³	Crew Van 3300 kg			Crew Van 3500 kg				Crew Van Maxi 3500 kg		
Medium wheelbase low roof										
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2066	2066	2066	2066	2066	2066	2146	2106	2106	2186
Payload [▼] (kg)	1234	1234	1234	1434	1434	1434	1354	1394	1394	1314
GVW (kg)	3300	3300	3300	3500	3500	3500	3500	3500	3500	3500
Top speed (MPH)	96	96	100	96	96	100	106	96	100	100
NEDC consumption (l/100 km)	7.3	7.1*/7.3	7.1*/7.3	7.3	7.1*/7.3	7.1*/7.3	8.5	7.1*/7.3	7.1*/7.3	8.9
NEDC consumption (mpg)	38.7	39.8*/38.7	39.8*/38.7	38.7	39.8*/38.7	39.8*/38.7	33.2	39.8*/38.7	39.8*/38.7	31.7
NEDC CO ₂ emissions (g/km)	192	186*/192	186*/192	192	186*/192	186*/192	224	186*/192	186*/192	236

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

CREW VAN (OPT. 7EB)

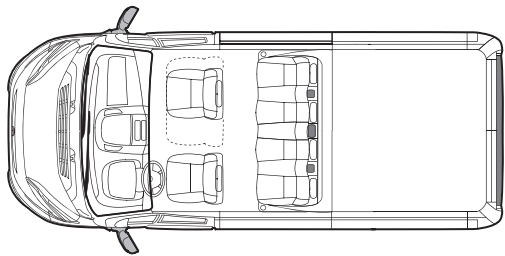


Volume 8 m ³ Medium wheelbase high roof	Crew Van 3300 kg			Crew Van 3500 kg				Crew Van Maxi 3500 kg		
	110 MultiJet	130 MultiJet	150 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2091	2091	2091	2091	2091	2091	2171	2131	2131	2211
Payload▼ (kg)	1209	1209	1209	1409	1409	1409	1329	1369	1369	1289
GVW (kg)	3300	3300	3300	3500	3500	3500	3500	3500	3500	3500
Top speed (MPH)	93	93	97	93	93	97	166	93	97	99
NEDC consumption (l/100 km)	7.3	7.1*/7.3	7.1*/7.3	7.3	7.1*/7.3	7.1*/7.3	8.5	7.1*/7.3	7.1*/7.3	8.9
NEDC consumption (mpg)	38.7	39.8*/38.7	39.8*/38.7	38.7	39.8*/38.7	39.8*/38.7	33.2	39.8*/38.7	39.8*/38.7	31.7
NEDC CO ₂ emissions (g/km)	192	186*/192	186*/192	192	186*/192	186*/192	224	186*/192	186*/192	236

Volume 10.5 m ³ Long wheelbase high roof	Crew Van Maxi 3500 kg		
	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2181	2181	2261
Payload▼ (kg)	1319	1319	1239
GVW (kg)	3500	3500	3500
Top speed (MPH)	93	97	99
NEDC consumption (l/100 km)	7.1*/7.3	7.1*/7.3	8.9
NEDC consumption (mpg)	39.8*/38.7	39.8*/38.7	31.7
NEDC CO ₂ emissions (g/km)	186*/192	186*/192	236

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

DROPSIDE TRUCK

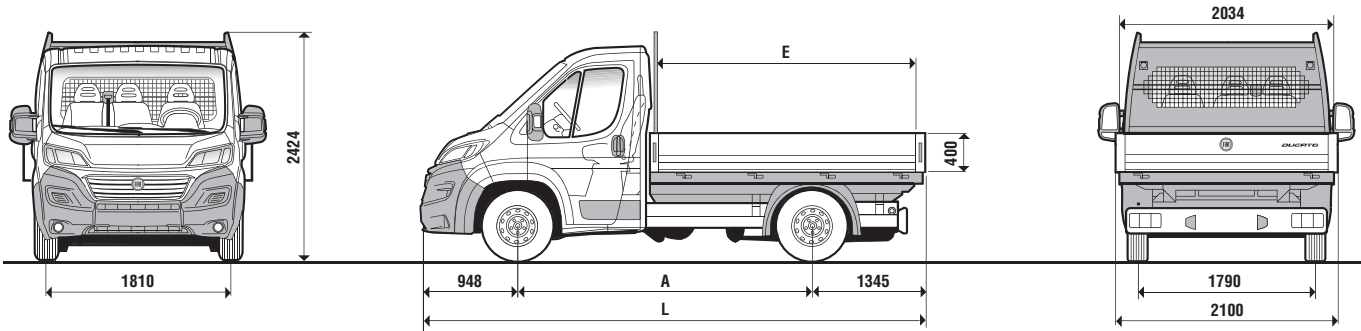

Dimensions mm	Truck 3000 kg			Truck 3300 kg			Truck 3500 kg		
A Wheelbase	3000	3450	3800	3000	3450	3800	3000	3450	3800
L Maximum length	5293	5743	6093	5293	5743	6093	5293	5743	6093
Maximum width	2100	2100	2100	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424	2424	2424	2424	2424	2424
Front overhang	948	948	948	948	948	948	948	948	948
Rear overhang	1345	1345	1345	1345	1345	1345	1345	1345	1345
E Flatbed internal length	2798	3248	3598	2798	3248	3598	2798	3248	3598
Flatbed internal width	2034	2034	2034	2034	2034	2034	2034	2034	2034
Side height	400	400	400	400	400	400	400	400	400


Wheelbase 3000 mm Load surface m ² 5.7	Truck 3000 kg				Truck 3300 kg				Truck 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1810	1810	1810	1890	1810	1810	1810	1890	1810	1810	1810	1890
Payload▼ (kg)	1125	1125	1125	1110	1390	1390	1390	1410	1510	1510	1510	1505
GVW (kg)	2935	2935	2935	3000	3200	3200	3200	3300	3320	3320	3320	3395
Top speed (MPH)	96	96	97	106	91	96	97	106	96	96	97	106
NEDC consumption (l/100 km)	6.4	6.2*/6.4	6.2*/6.4	7.7	6.4	6.2*/6.4	6.2*/6.4	7.7	6.4	6.2*/6.4	6.2*/6.4	7.7
NEDC consumption (mpg)	170	164*/170	164*/170	203	170	164*/170	164*/170	203	170	164*/170	164*/170	203
NEDC CO ₂ emissions (g/km)	44.1	45.6*/44.1	45.6*/44.1	36.7	44.1	45.6*/44.1	45.6*/44.1	36.7	44.1	45.6*/44.1	45.6*/44.1	36.7

Wheelbase 3450 mm Load surface m ² 6.6	Truck 3000 kg				Truck 3300 kg				Truck 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1855	1855	1855	1935	1855	1855	1855	1935	1855	1855	1855	1935
Payload▼ (kg)	1145	1145	1145	1065	1445	1445	1445	1365	1575	1575	1575	1565
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3430	3430	3430	3500
Top speed (MPH)	96	96	97	106	91	96	97	106	96	96	97	106
NEDC consumption (l/100 km)	6.4	6.2*/6.4	6.2*/6.4	7.7	6.4	6.2*/6.4	6.2*/6.4	7.7	6.4	6.2*/6.4	6.2*/6.4	7.7
NEDC consumption (mpg)	44.1	45.6*/44.1	45.6*/44.1	36.7	44.1	45.6*/44.1	45.6*/44.1	36.7	44.1	45.6*/44.1	45.6*/44.1	36.7
NEDC CO ₂ emissions (g/km)	170	164*/170	164*/170	203	170	164*/170	164*/170	203	170	164*/170	164*/170	203

Wheelbase 3800 mm Load surface m ² 7.3	Truck 3300 kg				Truck 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1890	1890	1890	1970	1890	1890	1890	1970
Payload▼ (kg)	1410	1410	1410	1330	1610	1610	1610	1530
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	96	96	97	106	96	96	97	106
NEDC consumption (l/100 km)	7.0	6.8*/7.0	6.8*/7.0	7.7	7	6.8*/7.0	6.8*/7.0	7.7
NEDC consumption (mpg)	40.4	41.5*/40.4	41.5*/40.4	36.7	40.4	41.5*/40.4	41.5*/40.4	36.7
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	203	183	177*/183	177*/183	203

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

DROPSIDE TRUCKS

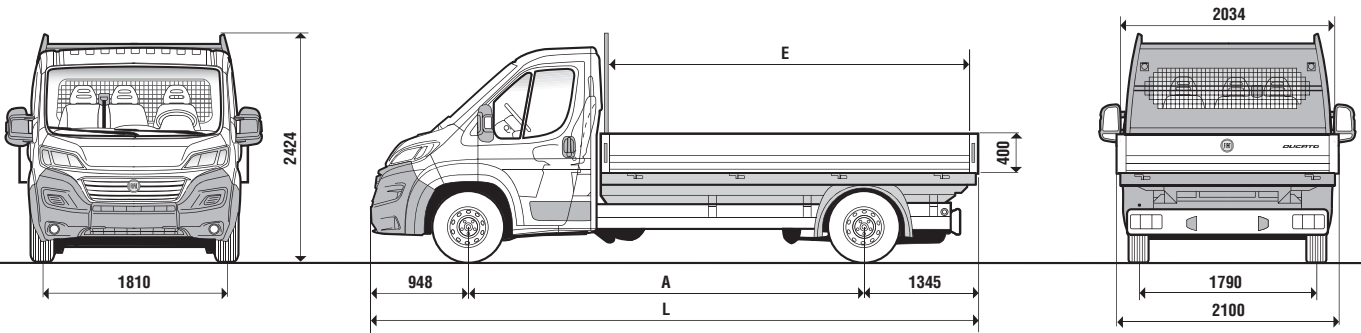


Dimensions mm	Dropside Trucks 3300 kg		Dropside Trucks 3500 kg	
A Wheelbase	4035		4035	4035 XL
L Maximum length	6328		6328	6693
Maximum width	2100		2100	2100
Front track	1810		1810	1810
Rear track	1790		1790	1790
Maximum height (unladen)	2424		2424	2424
Front overhang	948		948	948
Rear overhang	1345		1345	1710
E Flatbed internal length	3833		3833	4198
Flatbed internal width	2034		2034	2034
Side height	400		400	400

Wheelbase 4035 mm Load surface m² 7.8	Dropside Trucks 3300 kg				Dropside Truck 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1910	1910	1910	1990	1910	1910	1910	1990
Payload▼ (kg)	1390	1390	1390	1310	1590	1590	1590	1510
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	96	96	97	106	96	96	97	106
NEDC consumption (l/100 km)	7,0	6.8*/7.0	6.8*/7.0	7,7	7,0	6.8*/7.0	6.8*/7.0	7,7
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	36,7	40,4	41.5*/40.4	41.5*/40.4	36,7
NEDC CO ₂ emissions (g/km)	183	177*/183	177*/183	203	183	177*/183	177*/183	203

Wheelbase 4035 mm XL Load surface m² 8.5	Dropside Truck 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1945	1945	1945	2025
Payload▼ (kg)	1545	1545	1545	1475
GVW (kg)	3490	3490	3490	3500
Top speed (MPH)	96	96	97	106
NEDC consumption (l/100 km)	7,0	6.8*/7.0	6.8*/7.0	8
NEDC consumption (mpg)	40,4	41.5*/40.4	41.5*/40.4	35,3
Emissioni CO ₂ NEDC (g/km)	183	177*/183	177*/183	209

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

DROPSIDE TRUCKS MAXI

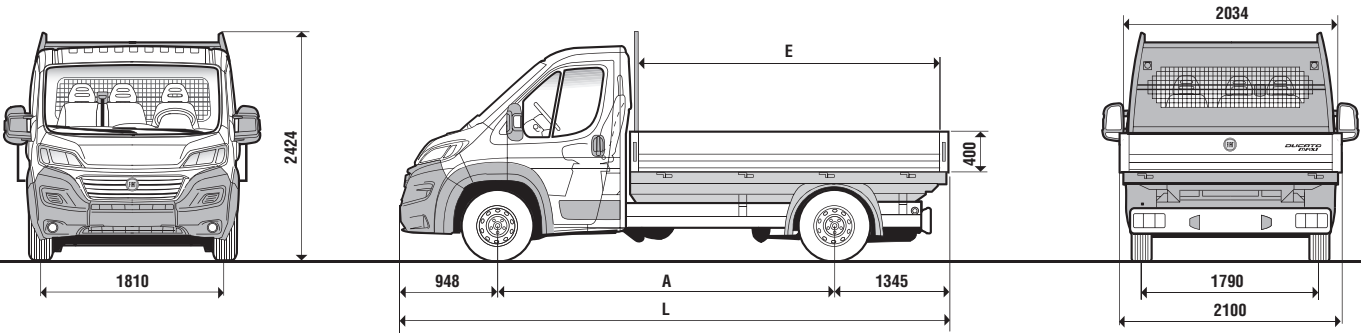


Dimensions mm	Dropside Truck Maxi 3500 kg		Dropside Truck Maxi 4000 kg	
A Wheelbase	3450	3800	3450	3800
L Maximum length	5743	6093	5743	6093
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424
Front overhang	948	948	948	948
Rear overhang	1345	1345	1345	1345
E Flatbed internal length	3248	3598	3248	3598
Flatbed internal width	2034	2034	2034	2034
Side height	400	400	400	400

Wheelbase 3450 mm Load surface m² 6.6	Dropside Truck Maxi 3500 kg			Dropside Truck Maxi 4000 kg		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1895	1895	1975	1895	1895	1975
Payload▼ (kg)	1605	1605	1525	2025	2025	1995
GVW (kg)	3500	3500	3500	3920	3920	3970
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	6.8*/7.0	6.8*/7.0	8,3	6.8*/7.0	6.8*/7.0	8,3
NEDC consumption (mpg)	41.5*/40.4	41.5*/40.4	34,0	41.5*/40.4	41.5*/40.4	34,0
NEDC CO ₂ emissions (g/km)	177*/183	177*/183	219	177*/183	177*/183	219

Wheelbase 3800 mm Load surface m² 7.3	Dropside Truck Maxi 3500 kg			Dropside Truck Maxi 4000 kg		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	1930	1930	2010	1930	1930	2010
Payload▼ (kg)	1570	1570	1490	2075	2075	2090
GVW (kg)	3500	3500	3500	4005	4005	4100
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	6.8*/7.0	6.8*/7.0	8,6	6.8*/7.0	6.8*/7.0	8,6
NEDC consumption (mpg)	41.5*/40.4	41.5*/40.4	32,8	41.5*/40.4	41.5*/40.4	32,8
NEDC CO ₂ emissions (g/km)	177*/183	177*/183	226	177*/183	177*/183	226

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

DROPSIDE TRUCKS MAXI

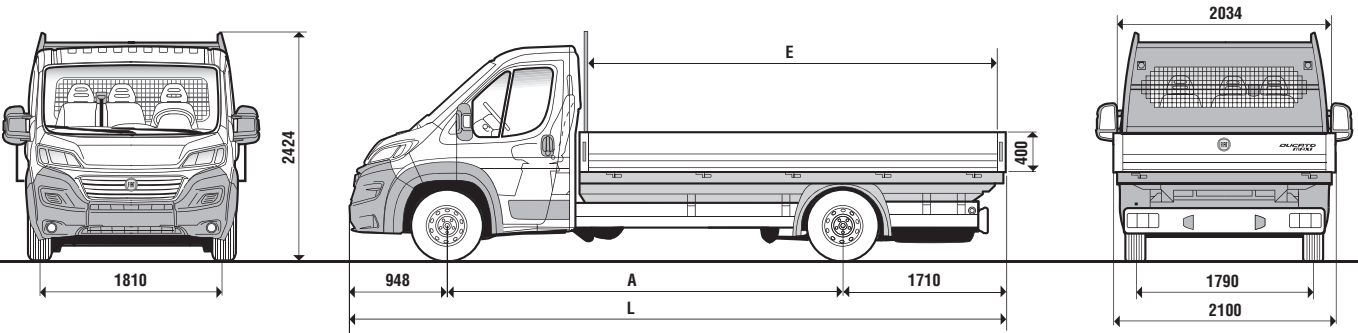


Dimensions mm	Dropside Truck Maxi 3500 kg		Dropside Truck Maxi 4000 kg	
A Wheelbase	4035	4035 XL	4035	4035 XL
L Maximum length	6328	6693	6328	6693
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424
Front overhang	948	948	948	948
Rear overhang	1345	1345	1345	1345
E Flatbed internal length	3833	4198	3833	4198
Flatbed internal width	2034	2034	2034	2034
Side height	400	400	400	400

Wheelbase 4035 mm Load surface m² 7.8	Dropside Truck Maxi 3500 kg			Dropside Truck Maxi 4000 kg		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	1950	1950	2030	1950	1950	2030
Payload [▼] (kg)	1550	1550	1470	2055	2055	2120
GVW (kg)	3500	3500	3500	4005	4005	4150
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	6.8*/7.0	6.8*/7.0	8,6	6.8*/7.0	6.8*/7.0	8,6
NEDC consumption (mpg)	41.5*/40.4	41.5*/40.4	32,8	41.5*/40.4	41.5*/40.4	32,8
NEDC CO ₂ emissions (g/km)	177*/183	177*/183	226	177*/183	177*/183	226

Wheelbase 4035 mm XL Load surface m² 8.5	Dropside Truck Maxi 3500 kg			Dropside Truck Maxi 4000 kg		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	1985	1985	2065	1985	1985	2065
Payload [▼] (kg)	1515	1515	1435	1985	2010	1940
GVW (kg)	3500	3500	3500	3970	3995	4005
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	6.8*/7.0	6.8*/7.0	8,6	6.8*/7.0	6.8*/7.0	8,6
NEDC consumption (mpg)	41.5*/40.4	41.5*/40.4	32,8	41.5*/40.4	41.5*/40.4	32,8
NEDC CO ₂ emissions (g/km)	177*/183	177*/183	226	177*/183	177*/183	226

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

DOUBLE (CREW) CAB DROPSIDE TRUCKS

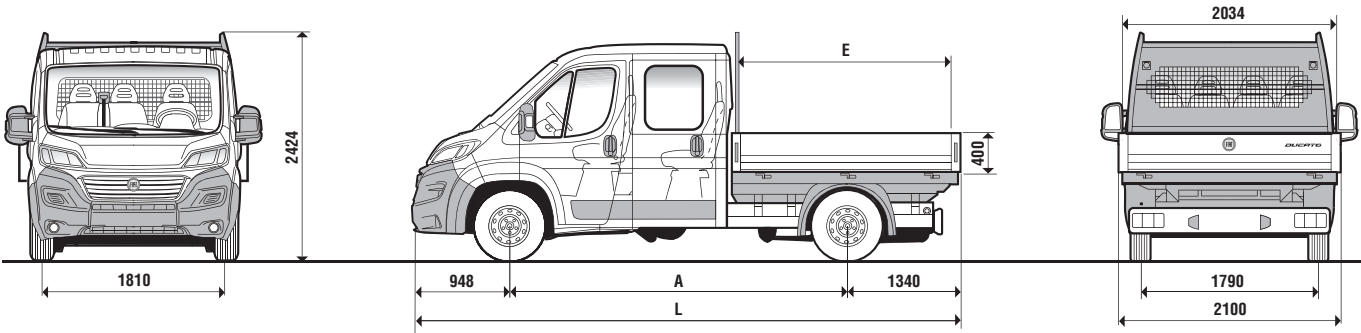


Dimensions mm	Double (Crew) Cab Dropside Trucks 3300 kg		Double (Crew) Cab Dropside Trucks 3500 kg	
A Wheelbase	3450	4035	3450	4035
L Maximum length	5738	6228	5738	6228
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424
Front overhang	948	948	948	948
Rear overhang	1340	1245	1340	1245
E Flatbed internal length	2398	2888	2398	2888
Flatbed internal width	2034	2034	2034	2034
Side height	400	400	400	400

Wheelbase 3450 mm Load surface m² 4.9	Double (Crew) Cab Dropside Trucks 3300 kg				Double (Crew) Cab Dropside Trucks 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight [▲] (tare) (kg)	2005	2005	2005	2085	2005	2005	2005	2085
Payload [▼] (kg)	1245	1245	1245	1215	1315	1315	1315	1345
GVW (kg)	3250	3250	3250	3300	3320	3320	3320	3430
Top speed (MPH)	96	96	97	106	96	96	97	106
NEDC consumption (l/100 km)	7,1	6.9*/7.1	6.9*/7.1	8	7,1	6.9*/7.1	6.9*/7.1	8
NEDC consumption (mpg)	39,8	40.9*/39.8	40.9*/39.8	35,3	39,8	40.9*/39.8	40.9*/39.8	35,3
NEDC CO ₂ emissions (g/km)	186	180*/186	180*/186	209	186	180*/186	180*/186	209

Wheelbase 4035 mm Load surface m² 5.9	Double (Crew) Cab Dropside Trucks 3300 kg				Double (Crew) Cab Dropside Trucks 3500 kg		
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet
Vehicle weight [▲] (tare) (kg)	2065	2065	2065	2145	2065	2065	2065
Payload [▼] (kg)	1235	1235	1235	1155	1435	1435	1435
GVW (kg)	3300	3300	3300	3300	3500	3500	3500
Top speed (MPH)	96	96	97	106	96	96	97
NEDC consumption (l/100 km)	7,1	6.9*/7.1	6.9*/7.1	8,5	7,1	6.9*/7.1	6.9*/7.1
NEDC consumption (mpg)	39,8	40.9*/39.8	40.9*/39.8	33,2	39,8	40.9*/39.8	40.9*/39.8
NEDC CO ₂ emissions (g/km)	186	180*/186	180*/186	224	186	180*/186	180*/186

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

DOUBLE (CREW) CAB DROPSIDE TRUCKS MAXI

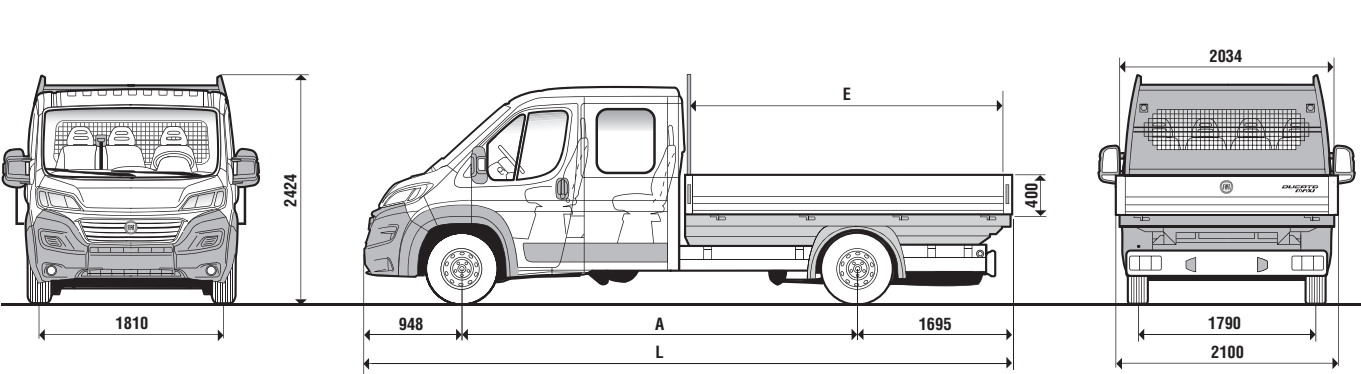

Dimensions mm	Double (Crew) Cab Dropside Trucks Maxi 3500 kg			Double (Crew) Cab Dropside Trucks Maxi 4000 kg		
A Wheelbase	3450	4035	4035 XL	3450	4035	4035 XL
L Maximum length	5738	6228	6678	5738	6228	6678
Maximum width	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424	2424	2424
Front overhang	948	948	948	948	948	948
Rear overhang	1340	1245	1695	1340	1245	1695
E Flatbed internal length	2398	2888	3338	2398	2888	3338
Flatbed internal width	2034	2034	2034	2034	2034	2034
Side height	400	400	400	400	400	400


Wheelbase 3450 mm Load surface m² 4.9	Double (Crew) Cab Dropside Trucks Maxi 3500 kg			Double (Crew) Cab Dropside Trucks Maxi 4000 kg		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2045	2045	2125	2045	2045	2125
Payload▼ (kg)	1455	1455	1375	1715	1715	1715
GVW (kg)	3500	3500	3500	3760	3760	3840
Top speed (MPH)	155	157	161	155	157	161
NEDC consumption (l/100 km)	6.9*/7.1	6.9*/7.1	8.9	6.9*/7.1	6.9*/7.1	8.9
NEDC consumption (mpg)	40.9*/39.8	40.9*/39.8	31.7	40.9*/39.8	40.9*/39.8	31.7
NEDC CO₂ emissions (g/km)	180*/186	180*/186	236	180*/186	180*/186	236

Wheelbase 4035 mm Load surface m² 5.9	Double (Crew) Cab Dropside Trucks Maxi 3500 kg			Double (Crew) Cab Dropside Trucks Maxi 4000 kg		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2105	2105	2185	2105	2105	2185
Payload▼ (kg)	1395	1395	1315	1815	1815	1820
GVW (kg)	3500	3500	3500	3920	3920	4005
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	6.9*/7.1	6.9*/7.1	8.9	6.9*/7.1	6.9*/7.1	8.9
NEDC consumption (mpg)	40.9*/39.8	40.9*/39.8	31.7	40.9*/39.8	40.9*/39.8	31.7
NEDC CO₂ emissions (g/km)	180*/186	180*/186	236	180*/186	180*/186	236

Wheelbase 4035 mm XL Load surface m² 6.8	Double (Crew) Cab Dropside Trucks Maxi 3500 kg			Double (Crew) Cab Dropside Trucks Maxi 4000 kg		
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2145	2145	2225	2145	2145	2225
Payload▼ (kg)	1355	1355	1275	1715	1715	1695
GVW (kg)	3500	3500	3500	3860	3860	3920
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	7.1*/7.3	7.1*/7.3	8.9	7.1*/7.3	7.1*/7.3	8.9
NEDC consumption (mpg)	39.8*/38.7	39.8*/38.7	31.7	39.8*/38.7	39.8*/38.7	31.7
NEDC CO₂ emissions (g/km)	186*/192	186*/192	236	186*/192	186*/192	236

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

TIPPER (OPT. 4G3)

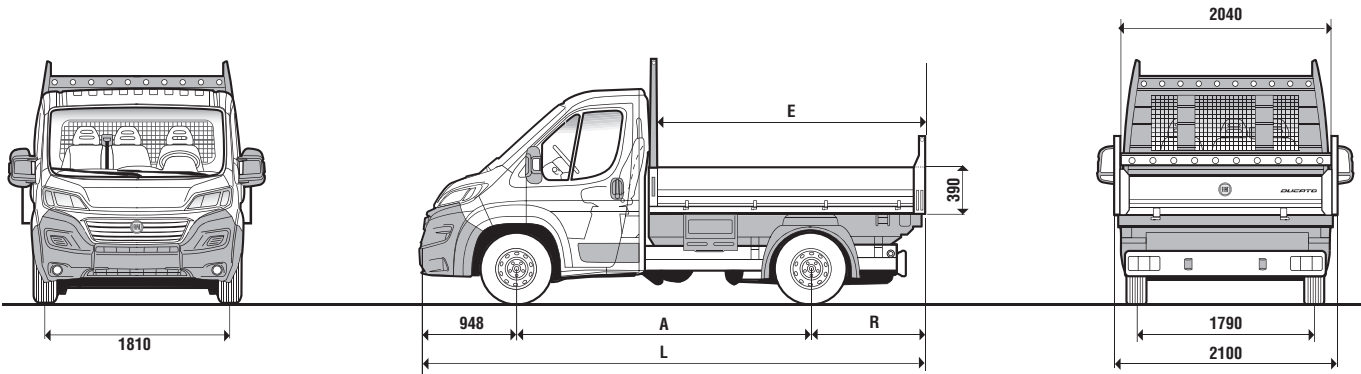

Dimensions mm	Tipper 3300 kg			Tipper 3500 kg		
	Single cab	Single cab	Single cab	Single cab	Single cab	Single cab
A Wheelbase	3000	3450	3800	3000	3450	3800
L Maximum length	5028	5578	5828	5028	5578	5828
Maximum width	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Front overhang	948	948	948	948	948	948
Rear overhang	860	860	860	860	860	860
E Flatbed internal length	2525	3075	3325	2525	3075	3325
Flatbed internal width	2040	2040	2040	2040	2040	2040
Side height	390	390	390	390	390	390


Wheelbase 3000 mm Load surface m² 5.1	Tipper 3300 kg				Tipper 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2273	2273	2273	2353	2273	2273	2273	2353
Payload▼ (kg)	927	927	927	947	1047	1047	1047	1042
GVW (kg)	3200	3200	3200	3300	3200	3320	3320	3395
Top speed (MPH)	96	96	97	106	96	96	97	106
NEDC consumption (l/100 km)	7.3	7.1*/7.3	7.1*/7.3	8.5	7.3	7.1*/7.3	7.1*/7.3	8.5
NEDC consumption (mpg)	38.7	39.8*/38.7	39.8*/38.7	33.2	38.7	39.8*/38.7	39.8*/38.7	33.2
NEDC CO₂ emissions (g/km)	192	186*/192	186*/192	224	192	186*/192	186*/192	224

Wheelbase 3450 mm Load surface m² 6.3	Tipper 3300 kg				Tipper 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2318	2318	2318	2398	2318	2318	2318	2398
Payload▼ (kg)	982	982	982	902	1112	1112	1112	1102
GVW (kg)	3300	3300	3300	3300	3430	3430	3430	3500
Top speed (MPH)	96	96	97	106	96	96	97	106
NEDC consumption (l/100 km)	7.3	7.1*/7.3	7.1*/7.3	8.5	7.3	7.1*/7.3	7.1*/7.3	8.5
NEDC consumption (mpg)	38.7	39.8*/38.7	39.8*/38.7	33.2	38.7	39.8*/38.7	39.8*/38.7	33.2
NEDC CO₂ emissions (g/km)	192	186*/192	186*/192	224	192	186*/192	186*/192	224

Wheelbase 3800 mm Load surface m² 6.8	Tipper 3300 kg			Tipper 3500 kg			
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2353	2353	2353	2353	2353	2353	2433
Payload▼ (kg)	947	947	947	1147	1147	1147	1067
GVW (kg)	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	96	96	97	96	96	97	106
NEDC consumption (l/100 km)	7.3	7.1*/7.3	7.1*/7.3	7.3	7.1*/7.3	7.1*/7.3	8.5
NEDC consumption (mpg)	38.7	39.8*/38.7	39.8*/38.7	38.7	39.8*/38.7	39.8*/38.7	33.2
NEDC CO₂ emissions (g/km)	192	186*/192	186*/192	192	186*/192	186*/192	224

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

TIPPER (OPT. 4G3)

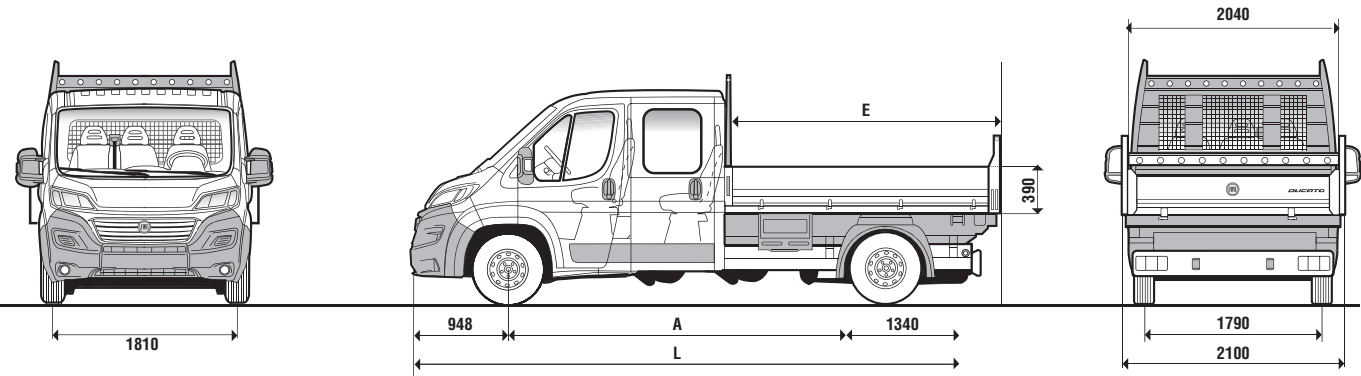

Dimensions mm	Tipper 3300 kg		Tipper 3500 kg	
	Crew cab	With rear Flatbed	Crew cab	With rear flatbed
A Wheelbase	4035	4035	4035	4035
L Maximum length	6123	6123	6123	6123
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Front overhang	948	948	948	948
Rear overhang	860	860	860	860
E Flatbed internal length	2750	2750	2750	2750
Flatbed internal width	2040	2040	2040	2040
Side height	390	390	390	390

Wheelbase 4035 mm Load surface m² 5.6	Tipper 3300 kg crew cab			Tipper 3500 kg crew cab		
	110 MultiJet	130 MultiJet	150 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet
Vehicle weight▲ (tare) (kg)	2528	2528	2528	2528	2528	2528
Payload▼ (kg)	772	772	772	972	972	972
GVW (kg)	3300	3300	3300	3500	3500	3500
Top speed (MPH)	96	96	97	96	96	97
NEDC consumption (l/100 km)	7,3	7.1*/7.3	7.1*/7.3	7,3	7.1*/7.3	7.1*/7.3
NEDC consumption (mpg)	38.7	39.8*/38.7	39.8*/38.7	38.7	39.8*/38.7	39.8*/38.7
NEDC CO ₂ emissions (g/km)	192	186*/192	186*/192	192	186*/192	186*/192

Wheelbase 4035 mm Load surface m² 5.6	Tipper 3300 kg with rear flatbed			Tipper 3500 kg with rear flatbed			
	110 MultiJet	130 MultiJet	150 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions	110 MultiJet	130 MultiJet	150 MultiJet	110 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2373	2373	2373	2373	2373	2373	2453
Payload▼ (kg)	927	927	927	1127	1127	1127	1047
GVW (kg)	3300	3300	3300	3500	3500	3500	3500
Top speed (MPH)	96	96	97	96	96	97	106
NEDC consumption (l/100 km)	7,3	7.1*/7.3	7.1*/7.3	7,3	7.1*/7.3	7.1*/7.3	8,5
NEDC consumption (mpg)	38.7	39.8*/38.7	39.8*/38.7	38.7	39.8*/38.7	39.8*/38.7	33,2
NEDC CO ₂ emissions (g/km)	192	186*/192	186*/192	192	186*/192	186*/192	224

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

TIPPER MAXI (OPT. 4G3)

Dimensions mm	Tipper Maxi 3500 kg					Tipper Maxi 4000 kg				
	Single cab	Single cab	With rear flatbed	Crew cab	Crew cab	Single cab	Single cab	With rear flatbed	Crew cab	Crew cab
A Wheelbase	3450	3800	4035	4035	4035 XL	3450	3800	4035	4035	4035 XL
L Maximum length	5578	5828	6123	6123	6448	5578	5828	6123	6123	6448
Maximum width	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790	1790	1790	1790
Front overhang	948	948	948	948	948	948	948	948	948	948
Rear overhang	860	860	860	860	1225	860	860	860	860	1225
E Flatbed internal length	3075	3325	2750	2750	3075	3075	3325	2750	2750	3075
Flatbed internal width	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
Side height	390	390	390	390	390	390	390	390	390	390

Wheelbase 3450 mm Load surface m² 6.3	Tipper Maxi 3500 kg			Tipper Maxi 4000 kg		
	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2358	2358	2438	2358	2358	2438
Payload▼ (kg)	1142	1142	1062	1562	1562	1532
GVW (kg)	3500	3500	3500	3920	3920	3970
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	7.1*/7.3	7.1*/7.3	8,9	7.1*/7.3	7.1*/7.3	8,9
NEDC consumption (mpg)	39.8*/38.7	39.8*/38.7	31,7	39.8*/38.7	39.8*/38.7	31,7
NEDC CO ₂ emissions (g/km)	186*/192	186*/192	236	186*/192	186*/192	236

Wheelbase 3800 mm Load surface m² 6.8	Tipper Maxi 3500 kg			Tipper Maxi 4000 kg		
	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2393	2393	2473	2393	2393	2473
Payload▼ (kg)	1107	1107	1027	1612	1612	1627
GVW (kg)	3500	3500	3500	4005	4005	4100
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	7.1*/7.3	7.1*/7.3	8,9	7.1*/7.3	7.1*/7.3	8,9
NEDC consumption (mpg)	39.8*/38.7	39.8*/38.7	31,7	39.8*/38.7	39.8*/38.7	31,7
NEDC CO ₂ emissions (g/km)	186*/192	186*/192	236	186*/192	186*/192	236

Wheelbase 4035 mm Load surface m² 5.6	Tipper Maxi 3500 kg with rear flatbed			Tipper Maxi 4000 kg with rear flatbed		
	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2413	2413	2493	2413	2413	2493
Payload▼ (kg)	1087	1087	1007	1592	1592	1657
GVW (kg)	3500	3500	3500	4005	4005	4150
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	7.1*/7.3	7.1*/7.3	8,9	7.1*/7.3	7.1*/7.3	8,9
NEDC consumption (mpg)	39.8*/38.7	39.8*/38.7	31,7	39.8*/38.7	39.8*/38.7	31,7
NEDC CO ₂ emissions (g/km)	186*/192	186*/192	236	186*/192	186*/192	236

Wheelbase 4035 mm Load surface m² 5.6	Tipper Maxi 3500 kg crew cab			Tipper Maxi 4000 kg crew cab		
	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2568	2568	2648	2568	2568	2648
Payload▼ (kg)	932	932	852	1352	1352	1357
GVW (kg)	3500	3500	3500	3920	3920	4005
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	7.1*/7.3	7.1*/7.3	8,9	7.1*/7.3	7.1*/7.3	8,9
NEDC consumption (mpg)	39.8*/38.7	39.8*/38.7	31,7	39.8*/38.7	39.8*/38.7	31,7
NEDC CO ₂ emissions (g/km)	186*/192	186*/192	236	186*/192	186*/192	236

Wheelbase 4035 mm XL Load surface m² 6.3	Tipper Maxi 3500 kg crew cab			Tipper Maxi 4000 kg crew cab		
	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Engine versions	130 MultiJet	150 MultiJet	180 MultiJet	130 MultiJet	150 MultiJet	180 MultiJet
Vehicle weight▲ (tare) (kg)	2608	2608	2688	2608	2608	2688
Payload▼ (kg)	892	892	812	1252	1252	1232
GVW (kg)	3500	3500	3500	3860	3860	3920
Top speed (MPH)	96	97	100	96	97	100
NEDC consumption (l/100 km)	7.1*/7.3	7.1*/7.3	8,9	7.1*/7.3	7.1*/7.3	8,9
NEDC consumption (mpg)	39.8*/38.7	39.8*/38.7	31,7	39.8*/38.7	39.8*/38.7	31,7
NEDC CO ₂ emissions (g/km)	186*/192	186*/192	236	186*/192	186*/192	236

▲ Kerb weight with supplies, spare wheel, tools and accessories ▼ Including driver * With opt. Start&Stop

STANDARD EQUIPMENT AND OPTIONS

Exterior		Vans	Glazed/ semiglazed van	Dropside Trucks and Tippers
Halogen headlights with double parabolic lens				
Double-arm door mirrors with side repeater				
Fuel cap with lock and flap				
Integrated rear fog and reversing lights				
Green filter and water in diesel sensor				
Side protection mouldings (+ wheel arches for Maxi versions)				
Third brake light				–
125-litre tank	4G9	•	•	•
Michelin Agilis “Green” tyres	4JE	•	•	•
Reflective windscreen	4G1	•	•	•
Painted handles	61A	•	•	•
Electric door mirrors + defrosting	41			
2 nd sliding side door	55	•	•	–
Comfort suspension	62	• / – (Maxi)	– / •	–
Oversized rear suspension (2500 kg)	57	–	–	• (Maxi) / –
Double-leaf rear suspension	77	•	•	
Self-levelling suspension	555	•	•	•
Air Comfort kit (linked to opt. 555)	75	• / – (Maxi)	• / – (Maxi)	•
Reinforced suspension	4GM	–	–	•
Fog lights	97	• / △	• / △	• / △
Headlight washer/wiper	102	•	•	•
Alloy wheels with 225/70 R15 tyres	108	– (Maxi) / •	– (Maxi) / •	– (Maxi) / •
16" alloy wheels	208	•	•	•
Winter tyres (225/70 R15) and (225/75 16")	141	•	•	•
Oversize tyres (225/70 15") and (225/75 16")	142	• / Maxi 4000 and 4250 kg	• / Maxi 4000 and 4250 kg	• / Maxi 4000 and 4250 kg
16" diamond-finish alloy wheels (Ducato)	431	•	•	•
16" diamond-finish alloy wheels (Ducato Maxi)	432	•	•	•
M+S tyres	144	•	•	•
Integrated hub caps	878	•	•	•
Rear splash guards	197	•	•	•
Metallic paintwork	210	•	•	•
Engine sump protection	237	•	•	•
Truck version with flatbed	288	–	–	•
Truck version with Tipper	4G3	–	–	•
Electric folding door mirrors	341	•	•	•
Cyclist protection bars	358	–	–	•
Ladder holder and cab protection grille for truck	475	–	–	/ – (Tipper)
Glazed rear doors	519	•		–
Glazed sliding side door	520	•		–
Retractable footboard, sliding side door side	553	•	•	–
260°-opening rear doors	619	•	•	–
Front splash guards	747	•	•	•
Rear footboard	75K	•	•	–
Tow hook setup	4HB	•	•	•
Fixed tow hook	6JA	•	•	–
Removable tow hook	960	•	•	–
Aluminium skid plate	ADL	• / △	• / △	• / △
Piano black skid plate	7GE	• / △	• / △	• / △
Body-coloured front bumpers (opt. 7P5 - 457 - 6DZ - 6WH - 4TU - 4TV)		•	•	•
LED DRLs on headlights	LM1	• / △	• / △	• / △
Hot stamping + piano black grille	MFM	•	•	•

Interior		Vans	Glazed/ semiglazed van	Dropside Trucks and Tippers
Steering column with axial adjustment				
Height-adjustable driver's seat				
Multifunction dashboard with open compartments, cup holder and refrigerated box in presence of air conditioning				
Cab door panels with door and electric window controls				
Cup holder	4B0			
TOP level instrument panel	4GF	•	•	•
Two-seater passenger seat with 3-point central seat belt	293			
Blind partition	149		•	–
Upholstered head restraints	188	•	•	•
Under-roof shelf (capucine)		• / Maxi 4000 and 4250 kg	• /	• / Crew cab
	835			
Compartment with lock	6ZQ	•	•	•
Techno dashboard	6BL			
Tablet holder	75Q	•	•	•
Seat casing	50E	•	•	•
Armrest and lumbar support for driver's seat	132			
Sliding glass partition	199	•	•	–
Adjustable passenger seat + armrest	297			
Leather steering wheel and gear lever knob	320	•	•	•
Thermoformed plastic load compartment wall lining	324	•	–	–
Load compartment wall lining at half height		• / Maxi XL	• / Maxi XL	–
	361			
Plywood load compartment floor protections	381	•	•	–
Heated passenger seat	452	•	•	•
Heated driver's seat	453	•	•	•
Height-adjustable passenger seat	454	•	•	•
Sprung driver's seat	640	•	•	•

Functional / electrical equipment

Power steering (with Servotronic on 130, 150 and 180 MultiJet)				
Display with digital clock and Trip computer				
Illuminated 12 V socket				
Heat-reflecting windows and electric front windows				
Speedometer, electronic rev counter				
Remote central locking		3 buttons	3 buttons	2 buttons
Load compartment roof light				–
Hooks to anchor the cargo and load at half height				–
Heated rear window	29	•	•	–
Engine oil level sensor	33	• / 180 MultiJet	• / 180 MultiJet	• / 180 MultiJet
Tachograph	650	•		•
Boosted battery (110 Ah)	782	• / 180 MultiJet	• / 180 MultiJet	• / 180 MultiJet
Battery disconnecter	5QD	•	•	•

= Standard • = Optional – = Not available △ = Mopar accessories

Functional / electrical equipment		Vans	Glazed/semiglazed vans	Dropside Trucks and Tipper
Start&Stop (only on 130 and 150 MultiJet)	5DE	•	•	•
Manual climate control	25	•	•	•
Rain and dusk sensor	51	•	•	•
“Dead locking” safety locks	64			
Transformer socket and battery setup	81	•	•	
Automatic independent heater (Webasto)	133	•	•	•
Automatic climate control	140	•	•	•
Additional heater	200	•	•	-
Rear heater setup	4N8	•	•	-
Additional programmable independent heater (Webasto)	205	•	•	•
Perimeter anti-theft system	213	•	•	•
TPMS (Tyre Pressure Monitoring System)	365	•	•	•
Comfort-Matic robotised automatic gearbox (only on 130, 150 and 180 HP MultiJet)	407	•	•	•
Cruise Control	416	•	•	•
Speed limiter + Cruise Control (only for 130 and 150 MultiJet)	NHR	•	•	•
Parking sensors	508	•	•	-
Daylight device (DRL) - daytime running lights	692			
Rear crossmember and light clusters	742	-	-	
12 V load compartment socket	823	•	•	-
Additional rear flow heater	906	•	•	-
Traction+ with Hill Descent Control	941	•	•	•
Rear climate control setup	4GT	•	•	-
More powerful alternator (180 A)	4WP	•	•	•
Black headlight frame	5EM	•	•	•
Rear removable roof light	58F	•	•	-
Rear door cargo net	51J	•	•	-
USB charging port	RS3	•	•	•
Smoker’s kit	989	•	•	•

Safety				
3-point seat belts with retractor for cab seats				
Height-adjustable head restraints for cab seats				
Driver airbag				
ESC (Electronic Stability Control) system with ABS, EBD, LAC (Load Adaptive Control), HBA, roll-over mitigation and Hill Holder	392			
LDWS (Lane Departure Warning System) + Signal and High Beam Recognition	41J	•	•	•
Dual passenger airbag	502	•	•	•
Single passenger airbag	CJ1	•	•	•
Front side bags + window bags	505	•	•	-
Normal size steel spare wheel	980			
Spare wheel winch	786			
Speed limiter (62 MPH / 100 km/h)	5BF	•	/ •	•

Audio / Telematics				
Dashboard radio setup (cables)				
Radio aerial integrated with right door mirror	5A0	•	•	•
DAB radio aerial integrated with right door mirror	54Q	•	•	•
DAB radio aerial integrated with roof	6GD	•	•	•
Uconnect™ radio with 5" touchscreen, CD player, USB port and AUX-in socket, steering wheel controls and Bluetooth®	6Q2	•	•	•
Uconnect™ DAB radio with 5" touchscreen, CD player, USB port and AUX-in socket, steering wheel controls and Bluetooth®	6Q3	•	•	•

SERVICES

FIAT CUSTOMER BENEFITS

When you buy a new Fiat Professional Vehicle, you buy more than just a van. Behind every van we sell there is the reassurance of a whole range of customer benefits and services designed to ake the ownership of your Fiat as enjoyable, affordable and trouble free as possible.

3 YEAR FIATCARE WARRANTY PACKAGE

All new Fiat vans come with this comprehensive package, which consists of the following:

2 YEAR, UNLIMITED MILEAGE, MANUFACTURER WARRANTY

Any repairs required as a result of faulty materials or manufacture are carried out free of charge – both for parts and labour.

3RD YEAR DEALER WARRANTY †

Any repairs required as a result of faulty materials or manufacture – either for parts or labour – are covered up to 120,000 miles (60,000 miles on passenger variants registered for hire & reward usage) from the date of first registration or the expiry of the 3rd year, whichever occurs first. The warranty is provided free of charge and is subject to conditions (full details are available from your Fiat Professional dealer).

3 YEAR PAINTWORK WARRANTY

Any paintwork defects due to faulty materials or manufacture will be rectified free of charge during the first 3 years.

8 YEAR ANTI PERFORATION WARRANTY

Subject to regular inspections being carried out, as detailed in the Fiat Services Booklet, any perforation of the bodywork due to corrosion will be repaired free of all parts and labour charges during the first 8 years.

12 MONTHS' PART AND REPAIR GUARANTEE

All genuine Fiat parts are guaranteed for 12 months, or the duration of the prevailing warranty on the vehicle, as are repairs carried out by any Fiat Professional dealer using genuine parts.

FIXED SERVICE COSTS

All Fiat Professional dealers operate a “Menu Pricing” programme, which guarantees fixed service and replacement costs, with no hidden extras. The price you see is the price you'll pay, unless you have given your consent for further work to be carried out.

INFORMATION AND CUSTOMER SERVICE

A Universal Freephone number (00800 3428 0000*) gives you access to our dedicated information and customer services facilities, providing you with details of Fiat Professional dealers offering additional services, such as extended workshop hours, Auto Clinic and Approved Bodyshop facilities. Fiat also believe it is important to stay in contact with you and will, subject to your agreement, telephone you from time to time to ensure that you are happy with your Fiat Professional vehicle and the service you receive from your dealer. You can also access information about Fiat products and services online on our comprehensive website at www.fiatprofessional.co.uk.

CIAO FIAT

CIAO FIAT is the new freephone number for customers and prospective customers – 00800 3428 0000. CIAO FIAT provides you with access to all our products and services in the UK and can be used even when you are abroad (the number can be called from most countries in Europe). The call is free from land lines in the UK and all Europe (except Switzerland). Mobile network charges may vary depending on whom your contract is with.



CIAO FIAT PROFESSIONAL MOBILE

A single number to feel special. Call 00.800.3428.0000 free from all over Europe* to request: ROADSIDE ASSISTANCE, Ciao Fiat Professional Mobile is the original Fiat Professional application for all its customers. You can access a range of services and assistance at the touch of a finger, wherever you are.Search Fiat Professional Mobile on App Store and Google Play.

3 YEARS' FIAT PROFESSIONAL ASSISTANCE SERVICE COVER

All new Fiats come with 3 years' Fiat Professional Assistance Service Cover, which includes Roadside Assistance. This service is provided on a free of charge basis and is available 24 hours a day, throughout the year. If you require the services which are provided, you should dial the Universal Freephone number 00800 3428 0000*, which can be reached free of charge in the UK, and select option 1 _ Roadside Assistance.

FIAT FINANCIAL SERVICES**

Fiat Financial Services offers a comprehensive range of finance and insurance plans including traditional Hire Purchase, Lease Purchase, Finance Lease and Guaranteed Asset Protection Insurance. Please ask your Fiat dealer for more information. Written quotations available on request.

FIAT CONTRACT HIRE***

Fiat Contract Hire provides hassle-free motoring for private and business customers _ you benefit from low initial outlay, regular rentals and no worry about disposing of your vehicle at the end of the contract. More and more businesses are turning to Contract Hire as a simple, tax-efficient way of financing their fleet. Contract Hire allows the use of a vehicle for a pre-determined fixed period and cost (subject to mileage and conditions) and has many features and benefits that your Fiat dealer will be delighted to discuss with you. You can also include a full maintenance package within the monthly rental. For more information, please contact your Fiat dealer, or call 0844 5614611.

* The Universal and UK Freephone number is free for most calls from landline and mobile phones. Calls from certain mobile phones and public telephones in some European countries may be charged according to the rates applied by the telephone operator.

† Only applicable to UK vehicles sourced through Fiat Group Automobiles UK Ltd.

** Fiat Financial Services is a trading style of FGA Capital UK Ltd. FGA Capital UK Ltd is authorised and regulated by the Financial Conduct Authority for General Insurance. Credit available to anyone aged 18 or over, subject to status. A guarantee may be required. Written quotations are available from Fiat Financial Services, PO Box 4465, Slough, SL1 0RW.

*** Fiat Contract Hire is a trading style of FGA Contracts UK Limited which is an appointed representative of FGA Capital UK Limited. Contract Hire finance facilities are available subject to credit approval. Written quotations are available from Fiat Contract Hire, PO Box 4590, Slough, SL1 WU.

Audio / Telematics		Vans	Glazed/ semiglazed vans	Dropside Trucks and Tippers
Uconnect™ NAV radio with 5" touchscreen, built-in navigator, CD player, USB port and AUX-in socket, steering wheel controls and Bluetooth®	6Q8	•	•	•
Uconnect™ NAV DAB radio with 5" touchscreen, built-in navigator, CD player, USB port and AUX-in socket, steering wheel controls and Bluetooth®	6Q9	•	•	•
Rear-view camera (only for 6Q2, 6Q3, 6Q8 and 6Q9 radios)	316	•	•	•
Bluetooth® radio	7BY	■	■	■
Bluetooth® DAB radio	7BZ	•	•	•
Radio controls on steering wheel (only for 7BY and 7BZ radios)	245	■	■	■

Mopar accessories

Front anti-turbulence deflectors	△	△	△
Aluminium folding ladder for low/medium roof	△	△	△
Aluminium roof rack for short/medium/long wheelbase	△	△	△
Loading roller to be combined with the aluminium roof rack	△	△	△
Aluminium roof bars for short/medium/long wheelbase	△	△	△
Aluminium additional bar for long wheelbase	△	△	△
Extractable tow hook	△	△	△
Fixed tow hook	△	△	△
13-pole wiring for tow hook	△	△	△
Front and rear rubber splash guards	△	△	△
Conventional alarm	△	△	△
Protections for replacing a tyre	△	△	△
Front carpet mats with Ducato logo (2- or 3-seater) for 7-seater Crew Cab	△	△	△
Front rubber mats	△	△	△
Front seat covers	△	△	△
Load blocks	△	△	△
Rear door glass protective grilles	△	△	△
Side-removable floor	△	△	△
4 16" alloy wheels kit (1374083080) with 4 hub cap logos (1358877080)	△	△	△
4 15" hub caps kit (1374086080)	△	△	△
4 16" hub caps kit for light (1374087080)	△	△	△
Tyre valve caps with Fiat logo	△	△	△
Key cover kit (13 subjects available)	△	△	△
Chrome-plated number plate holder	△	△	△
1 kg powder fire extinguisher	△	△	△
2 kg powder fire extinguisher	△	△	△
Anti-theft wheel bolts for 15" rims	△	△	△
Anti-theft wheel bolts for 16" rims	△	△	△
Tools for replacing a tyre	△	△	△
Tyre-repair canister	△	△	△
Extension with USB cable retractor for iPod	△	△	△

■ = Standard • = Optional – = Not available △ = Mopar accessories

Model specifications and options may vary due to certain market or legal requirements. The data contained in this publication are purely indicative. Fiat may change the models described in this publication at any time for reasons of a technical or commercial nature.
Fiat Marketing 04.3.2205.52 - S - 09/2014 - Printed in Italy - Ciesse Printer Srl.
Printed on chlorine-free paper.

www.fiatprofessional.com

